

JR & MODELER

Special!
Build Your
Own Rocket!
See page 26

BULK RATE
U. S. POSTAGE
PAID
Columbia, Mo.
Permit No. 27

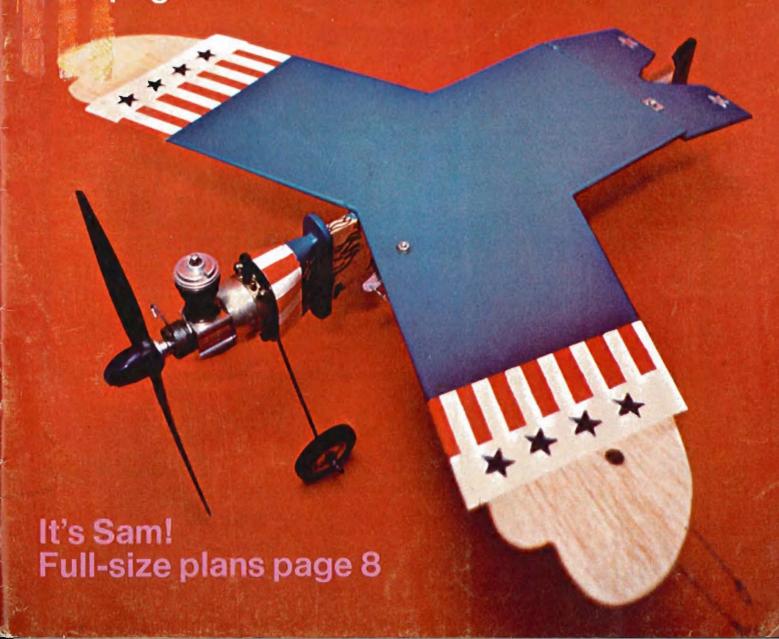

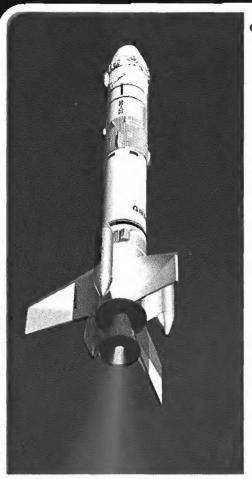

Fly High Centuri

Just imagine... High Flying Rockets that you blast off from your own launch pad...then, as your rocket streaks high in the sky.... Apogee.... and, a delayed blast opens the nose cone... out pops the colorful parachute floating your rocket gracefully back to earth... to fly high again... and, again.... fun and more fun.



See the NEW CENTURI STARTER KIT..... Everything you need to build, launch & fly your first.... and all your Centuri Rockets.

KIT INCLUDES:

ASTRO I Rocket Kit - Ready for Assembly New SERVO-LAUNCHER System Three Rocket Engines & Igniters Parachute Padding Rocketeer Guidebook Handy Field Carrying Case Iron-on colorful Centuri Shirt Patch

At your local hobby dealer

Centuri E	Engine	ering	Co.,				
P.O. Box	1988,	Dept.	JAIII	1	Phoenix,	Az.,	85001

Enclosed is 25¢ (refunded on first order). Please send me the 1972 Model Rocket Catalog.

Name_____Age_____

Address

City____State___Zip___

YOU'RE JUST IN TIME FOR THE NEW 1972 MODEL ROCKET CATALOG!

Crammed full of new rocket coupon for your exciting kits, engines, flight patterns and materials. Send 25¢ with rockets.



the quality leader in model rockets

130 EAST 33RD STREET/LOS ANGELES, CALIFORNIA/90018 THESE PRICES GOOD UNTILL JAN. 1st.

4046120

ALL-TIME FAVORITES ! GOLDBERG U/C LI'L SATIN 1/2A Combat \$227 19"span, .049 disp. . GOLDBERG LI'L JUMPIN' BEAN 1/2 A \$276 21"span, .049 disp. **GOLDBERG U/C STUNTMAN 23** \$317 23½"span. .049 disp. MIDWEST F/F 'SNIFFER' (cabin model) \$447 30"span. .010-.049 disp. MIDWEST F/F JETSTREAM (contest glider) \$447 MIDWEST F/F JABBERWOCK (contest \$447 rubber power) 32"span . . MIDWEST GOLLYWOCK F/F (rubber power) Simple Box Construction 32"span. . . . \$447 STERLING U/C RINGMASTER \$599 42"span .19-.35disp. Reg.\$7.95 STERLING U/C RINGMASTER JR.

BOATING SPECIAL

Dumas LI'L SWAMP BUGGY & COX 049 Babe Bee

A rugged 049 powered Florida Everglades boat for free running or radio control. All birch plywood & mahogany, 18" LONG REGULARLY \$6.95 COX .049 Babe Bee, the perfect engine for the swamp buggy. REGULARLY \$5.98

\$12.93 VALUE

5899

WE DISCOUNT MORE NATIONAL BRAND HOBBY SUPPLIES THAN ANYONE . . ANYWHERE !

SEND FOR A CATALOG TODAY I



1/2A U/C

PLANES

SALE

M99

the FIREBIRD is a %A STUNT/COMBAT trainer. Does all around maneuvers in the AMA rule book. Molded foam wing.

MIDWEST PROFILE & FOX 35 SPECIAL

30"span .09-.19disp. Reg.\$5.95 STERLING U/C BEGINNERS MUSTANG

YOUR CHOICE OF ONE (1) MIDWEST PROFILES P-51 MUSTANG, P-63 COBRA, or ME-109 MESSERSCHMIDT. REGULARLY \$10.95 EACH!



SNORKY & FOX 15 U/Control SPECIAL!



he FOX 15 is the ideal engine for the easy to ly, great trainer 'SNORKY'. THIS COMBINA-TON WILL GIVE YOU HOUR AFTER HOUR

TOGETHER \$19.90 VALUE

DESIGNED FOR THE BEGINNER MIDWEST



(1) r.o.g., (1) Cabin Model and (2) Gliders ! All building material is included in this 'Start 'em flying' Kit set.

COX Dune Buggy

POWERED BY COX .049 engine, with high impact, styreen body with silver-REG .\$22.00

\$487


\$276

96

COX -FOUR-FORTY starting kit for cars. All included Only\$3.91



This SPECIAL, offers the 'SUPER' SNIFFER, 300 sq.in. wing area & regularly sells for \$8.95—PLUS COX's famous Babe Bee FOR ONLY



TESTORS R/C Skyhawk Set

R/C PLANE. . . READY TO FLY Right out of the box !



R/C TESTORS RADIO CONTROLLED PLANE Features 8 transistors transmitter, superhet receiver, nicad airbourne pack, and true pulse control actuator.

GIANT DISCOUNT

R/C PLANES-R/C CARS-R/C BOATING-RADIOS-ENGINES-SUPPLIES AND HARDWARE - PLASTIC MODELS-SHIP MODELS HO RAILROADING - 'O' RAILROADING - 'N' RAIL ROADING AND MUCH MUCH MORE! 200 PAGE

oday

I enclose 50¢ for HOBBY PEOPLES newest hobby catalog. Please rush it

HOBBY PEOPLE to me today I

130 EAST 33RD STREET LOS ANGELES, CALIFORNIA 90011

NAME ADDRESS.

CITY STATE

POSTAGE & HANDLING


To \$5.00 Add 60¢ \$5.01 To \$8.00 Add 80¢ \$8.01 To \$15.00 Add \$1.10 \$15.01 To \$20.00 Add \$1.50

\$20.01 To \$30.00 Add \$2.50 \$30.01 To \$50.00 Add \$2.75 ORDERS OVER \$50.00 Please Add.....\$3.00

CALIFORNIA RESIDENTS ADD 5% SALES TAX

HOBBY PEOPLES WAREHOUSE STORE

OPEN TO THE PUPLIC: MON.thruFR1, 8a.m. to 4p.m. SAT, 8a.m. to 5p.m 130 EAST 33rd STREET, LOS ANGELES, CALIFORNIA 90011 AREA CODE (213) 233-4484



SUPER TRUCKS T-509 CHEVY TITAN 90 1/25th Scale Model of the Biggest Chevy of em all. Super detailing, Ten vinyl tires. \$399 \$499

1/25th Scale Model of Fruehauf's 9,000 gallon \$499 tank-trailer. Over 19" long ! \$399

T-506 FRUEHAUF TANKER REG.\$5.00

T-502 PETERBILT 'Pacemaker' REG.\$5.00. \$399 \$399 T-500 PETERBILT 'Calif. Hauler' REG.\$5.00. ...\$399 T-507 FRUEHAUF FB VAN REG.\$5.00

JR & MODELE

THE HOW-TO-DO-IT MAGAZINE FOR THE BEGINNER AND SPORT FLIER.

William J. Winter Editor and Publisher

Thomas L. Murphy Art Director

Anne R. Fuhrken Editorial Assistant





See page 32



See page 40

VOLUME 1, NUMBER 1	NOVEMBER-DECEMBER 1971
FEATURES:	
Pylon Polisher, Don Berliner	
An Introduction to Radio Control	(Part I), Fred Marks14
A Beginning in Model Rocketry, F	rank Genty26
ARTICLES:	
Models to Build:	
It's Sam!, Frank Scott	
Flip and Flop	
Feathercopters, Henry Sherrerd	
Earth-Moon Gizmo, Pat March	
Techniques:	
The Sticky Glue Mess!, Howard M	cEntee36
Model Manual	
DEPARTMENTS:	
Editorial - JAM Session, William J.	Winter 5

Published bi-monthly by Potomac Aviation Publications, Inc., 733 Fifteenth Street, N.W., Washington, D.C. 20005. William J. Winter, Publisher; Edward C. Sweeney, Jr., President; Harvey E. Cantrell, Secretary and Business Manager.

ADVERTISING DEPARTMENT 733 15th Street, N.W., Washington, D.C. 20005 (202) 737-4288

Western Advertising Representative: Aaron D. Viller & Associates, 5311 Venice Blvd., Los Angeles, California 90019. Tel: (213) 939-1161

Midwest and Eastern Advertising Representative: Boynton and Associates, 462 Rugby Rd., Barrington, III. 60010. Tel: (312) 381-7726.

Subscription Rates: In U.S., Possessions and Canada, 6 issues \$3.00, 12 issues \$6.00. Elsewhere, 6 issues \$4.00, 12 issues \$8.00. Payable in advance. Single copies, 60 cents. Six weeks are required for change of address. In ordering a change, write to JR. American Modeler, 733 Fifteenth Street, N.W., Washington, D.C. 20005. Give both new and old address as printed on last label.

We cannot accept responsibility for unsolicited manuscripts or artwork. Any material submitted must include return postage. When writing the editors address letters: Editorial office, JR. American Modeler, 733 Fifteenth Street, N.W., Washington, D.C. 20005.

Second class postage paid at Washington, D.C. and at additional mailing offices.
© Potomac Aviation Publications, Inc., 1971. All rights reserved. Printed in U.S.A.

Postmaster: Send Form 3579 to JR. American Modeler, 733 Fifteenth Street, N.W., Washington, D.C. 20005



he strange and wonderful aircraft in the picture below is the "Puffin II". Glanced at it looks like a huge Nordic towline glider coming in for a slow landing. But how about that spinning prop behind the tail? Or perhaps it could be a record-breaking duration radio-control model off to a typically staggering start. But what about the man running beneath it? Or the silhouetted figure in the nose. A man riding a unicycle?

Puffin II is one of the handful of man-powered aircraft which have flown successfully. Oozing by at an altitude of 17 feet in the photo, the lightly-built craft covered 933

yards—about six-tenths of a mile—before its fullthrottle pilot-engine ran out of "gas."

The Puffin is a singularly appropriate subject for this first issue of the JR. American Modeler. For both the unique airplane and the equally unique new magazine prove that new frontiers remain in this aeronautical world. We may not be able to share the fantastic sensations of Puffin's furiously peddling pilot, but we can share the thrills of the first test hop of a daring publication designed to reach the 10- to 16-year-old beginner, and the fun-sport modeler of

all ages. Beginners may be any age—seven to 70!

Puffin, combining concepts and configuration by a process that can only be termed "soaring imagination" proved it can fly. Everybody—modelers, manufacturers, and assorted kibitzers—hopes that a radical magazine like JR.

American Modeler can fly. We know it will.

The concept, like Puffin's, is a challenge. "JAM" will emphasize model airplanes, but will include boats, cars, rockets, kites and educational projects which are fun to build and a pleasure to own. The very finest of designers, writers, and draftsmen, will zero in on imaginative projects, detailed but simple plans, and readable, enjoyable "copy." Where possible plans will be full-size in the magazine, so our enthusiastic readers can begin to build "right now" and without the expense of having to send away for, and purchase, a plan. When the size of the design makes a full-size drawing absolutely impossible, our plan-service will price the plans at cost. The articles and plans will not be cramped for space. Simple, large pictures will distinguish layouts which will consume as many pages as the subject and material may demand.


The keystone of this presentation is a highly developed how-to-do-it treatment—in illustrations, picture features, articles. The models will be fun to build, and more fun to operate. But the basics—the things they don't tell us about—will be, at long last, thoroughly covered. Many contributors even now are working up materials on the bending of wire, working with balsa, covering, and finishing. We will find out how to trim and adjust a free-flight model, to fly

towline gliders. To solder. To use sandpaper.

The design and construction of all kinds and types of models will cease to be a mystery. Better plastic models will result as experts show us the techniques of neat and accurate building, and authentic, nifty finishes. The thrills and rewards of radio-control models will be brought within our grasp through simple, inexpensive designs, and control systems. But, be warned, the reader will always have to work, and become a genuine modeler, because all this definitely is not "kid stuff." JAM is really filling a need we all feel. It is the pipeline between all those experts and idea guys, and those of us who want worthwhile things to do.

How about the configuration? In an airplane, like

Puffin, configuration is the shape and arrangement of things-where they put the wing, for example. Or the prop and tail. How it "eveballs." JAM, as you see, is the same size as its Senior companion, AAM. It will always be at least 48 pages, probably more. Its cover price is lower than AAM's at 60 cents. A sixissue subscription is \$3.00. For the first year, it will appear every other month (the publisher, like Puffin's pilot, must not run out of gas!). But with the November 1972 issue it will go monthly. It will not be on the newsstands for some time, but is obtainable at your local

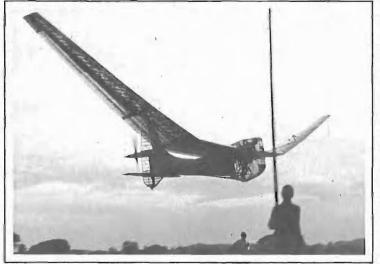

hobby shop or by subscription.

Puffin II, if you still wonder, has a 93-foot wing! It weighs 140 pounds empty. The cruising horsepower at four feet altitude is .49. That's less than a hot .60 model engine. But the pilot-engine has the torque to turn a big, biting

prop. So does JAM!

Man-powered aircraft are being tried in a number of countries. Although inventors going back as far as Leonardo da Vinci in the fifteenth century were intrigued by man-powered flight, the first serious undertaking was Alexander Lippisch's ornithopter in 1929. (Wing flapper.) In 1933 Oskar Ursinus, editor of *Flugsport* magazine in Germany, offered a 500-mark prize for a 1 km flight around two pylons 400 meters apart. Haessler and Villinger did fly 790 yards but required a launching assist. In 1936-7 a similar prize was offered in Italy and successful flights were claimed.

Then, in 1959, the Royal Aeronautical Society of Great Britain formed the Man-Powered Aircraft Group. A prize of 5000 pounds was offered that year by Henry Kremer, for a figure-of-eight flight. In 1962 the Aeronautical Society in that country offered a 50-pound prize for a half-mile straight flight. And in 1967 the Kremer Competition increased the prize money to 10,000 pounds. A number of successful flights have been made since then, notably in England and Japan.

We are indebted to Model & Allied Publications, 13/35 Bridge St. Hemel Hempstead, Herts, England, for the photo. M.A.P. is the publisher of *Man Powered Flight*, by

Keith Sherwin.



· FREE FLIGHT

RADIO CONTROL

V00D00 — 36" combat-stunt for .19-.35 engine.Single kit \$4.50 Double kit \$7.95

Voodoo

COMBAT








1/2 A BLA span, for	ZER — Die-c .049 engine.	ut balsa,	tissue, 40" \$4.50
RANGER .010049	30 - Die-cut	balsa, 30	0" span, for \$3.50

1/2 A Viking

VIKING - 48" span, Hi-thrust, for .049-.051



Stunt Man 23


fuselage, 21" span, for .049 engine \$3.50
STUNT MAN 23 — Die-cut balsa, 23½", for
P-40 FLYING TIGER — 18" span, all balsa pre-fab for .049 engine \$2.95
LI'L JUMPIN' BEAN — 21 ³ span Favorite ½A stunt model
SWORDSMAN 18 — Die-cut balsa, 18" span, for .020049 engine,
PROFILE_STUNTERS
Cosmic Wind

SHOESTRING STUNT! model for ,1935 engir	R — 42"	Тор	st \$	uni 6.9
wittman BUSTER — 4 for .1935 engine	0" Sharp	stunt	mo	del
COSMIC WIND -43"	span, for	r .19	to	,35

CARL GOLDBERG MODELS INC. 2544 W. Cermak Rd., Chicago, III. 60608 I am sending 20r for 8 pg. Illustrated Catalog with "Recommendations in Starting in R/C," Basic Explanation of R/C Equipment, and Radio Control Definitions.

GOLDBERG 2544 WEST CERMAK ROAD CHICAGO, ILLINOIS 60608


It's Sam?

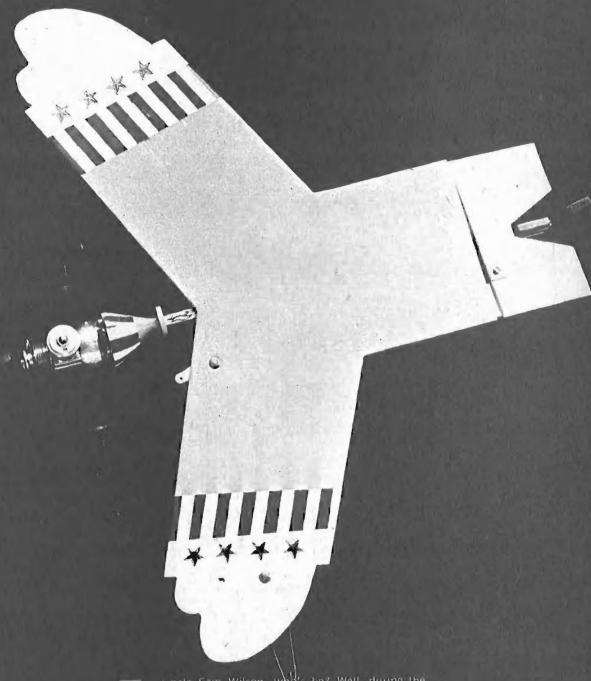

ncle Sam Wilson, who's he? Well, during the War of 1812, Sam Wilson supplied beef to the United States Army. The barrels that the meat was packed in were stamped "U.S." and some people said that this marking meant Unite Sam. Whatever Uncle Sam Wilson, as he was popularly known, looked like is not known to most of us, but cartoonists from the 1830's until the Civil War drew a lanky sort of bearded fellow as Uncle Sam, who, along with his nephew Brother Jonathan, was interchangeable in representing the United States in newspaper cartoons. With the Civil War, Brother Jonathan disappeared and Uncle Sam as we know him sprang from the drawing board of Thomas Nast in the 1870's.

Now since the first airplane was flown in this country it seems unfair that our Uncle Sam should have to remain

by FRANK SCOTT

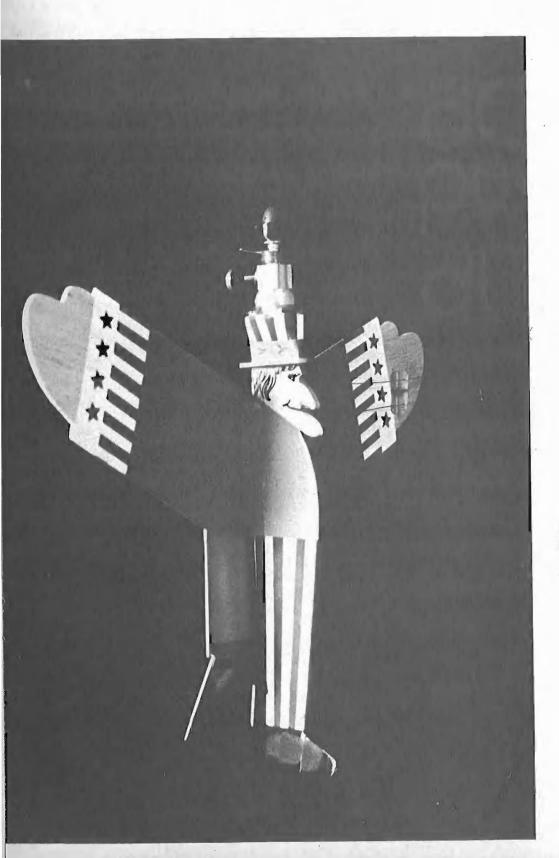

Oh, Say Can You See! The Stars and Stripes Forever! That's not a space capsule on Uncle's hat, but a Cox .02, set to blast off into groovy circles. He's with it, man. Swept-forward wings are O.K. earthbound and so, to sort of even things up, we present an Uncle Sam fully capable of flight on his own.

With his striped hat and trousers, and coat of blue emblazoned with stars he will be a splendid addition to any ½A (.049-sized engines) flight line. In spite of his uncommon appearance he will take to the air much like any other model, for, when you get right down to it, he is only a stretched-out flying wing. And very easy to build at that.

Begin construction by cutting out the wing (coat) from a nice warp-free sheet of 1/8"-thick balsa. Then find a table or flat board big enough to lay out the wing parts and cover it with a piece of Saran Wrap to keep the glue from sticking where it doesn't belong. Any sort of white glue, such as Elmer's, or model airplane cement for wood models, will work fine for this project. Next, apply glue to the appropriate edges and assemble the wing. Pin down, or place weights as needed to keep the parts in position while the glue dries, and forget about the wing until the next day or so.

With the assembly of the wing out of the way, trace the outline of the fuselage onto the 4"-thick sheet balsa. This may be done with carbon paper, or by punching a series of holes around the outline with a pin, and then, after the plan is removed, connecting the pin pricks with a ballpoint pen. You may notice, heh, heh, that this is one fuselage that is truly a "Body." Anyway with the body traced upon the wood, a coping saw or jig saw will be handy to cut out the fuselage. Trace the firewall pattern onto 1/8" plywood, drill the proper holes for mounting your engine, and then saw out the part. Since you may find plywood tough to saw, cut just a little ways outside the desired line and bring it down to finished size with a piece of rough sandpaper wrapped around a small wooden block.

With this done, press the blind mounting nuts (ask your hobby dealer) into holes and the firewall may then be glued into place as the top of Uncle's hat. This assembly will need to be strengthened by adding triangular pieces of wood behind the firewall. This may be done in two ways, either a simple wedge or the stronger blocks made from two layers of scrap fuselage wood which, when dry, can be carved and sanded round to make a better looking hat. Finish the hat

by adding the two hat brim halves.

With the front end now in good order we will turn our attention to the other end. Since Sam has no fin and rudder assembly as would a more conventional airplane, we'll have to fake it with his feet (foot!). Carefully cut about halfway through his ankle (ouch!) from the right side, fill the saw cut with glue (that should sting!) and bend the foot about a 3/8" to the right. As would a rudder, this will help turn the


model outwards to keep the flying lines tight. About all

that is left on the fuselage is to sand it smooth, taking care not to round the corners on top.


Now that the wing is dry you may find that the glue seams are a bit lumpy. Smooth both sides of the wing with fine sandpaper wrapped around a block and then simply round all edges of the wing with your sandpaper to finish it. On a model of this type there is really very little to be gained in tapering the trailing edges and so forth, and so we won't bother. Cut out the elevators (coattails) and sand them in like manner.

You now may put a layer of glue down Sam's back from his collar to the notch on the top of his legs and carefully locate and pin the wing in place until it is quite dry. Note that the trailing edge of the wing will line up with the front of the notch. This joint may be strengthened with the addition of a strip of wood down each side.


(Continued on page 48)

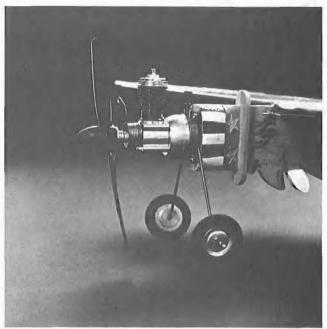

Optional wheels make takeoffs and landings routine. Without the landing gear, Sam is speedy, but may get his beard trimmed on rough ground. Use helper for hand launching.

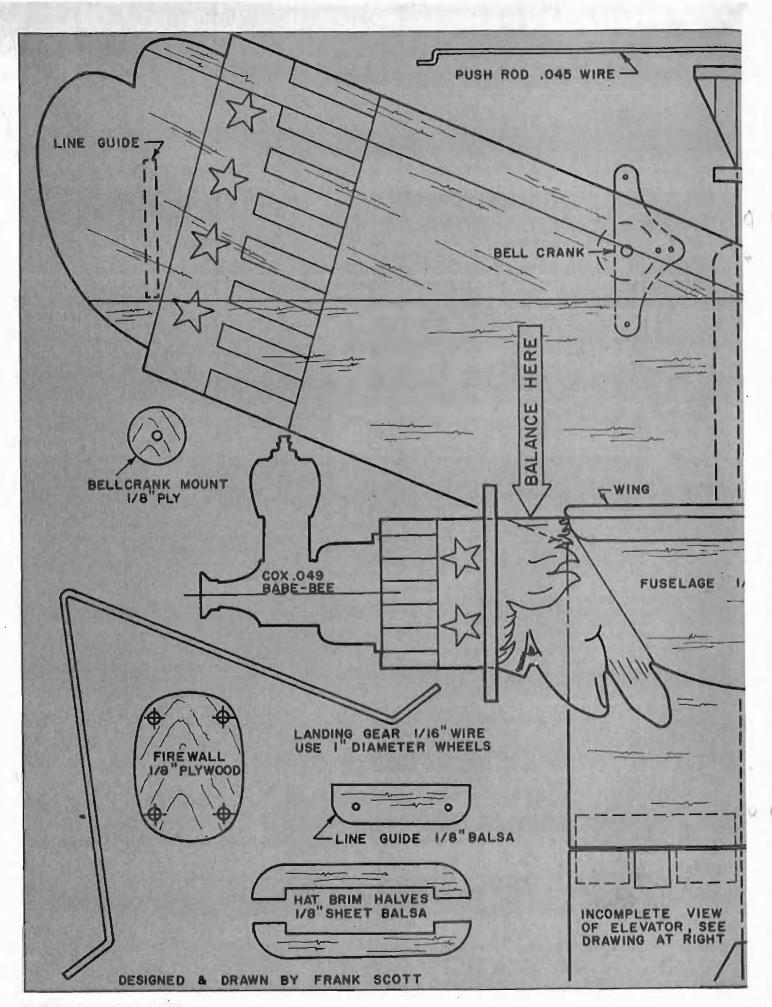

10 November-December 1971

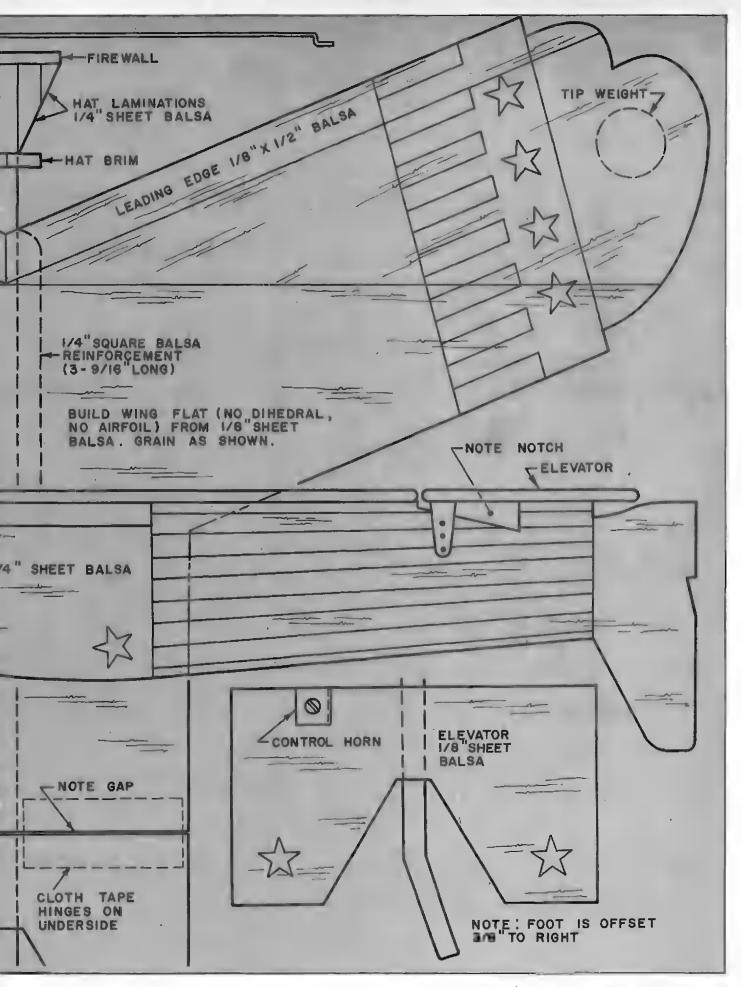

JR. American Modeler 11





n his days off, he flies around in ■ purple P-51 with ■ huge stuffed "Snoopy" riding in the back seat.

Some of the time, he delivers snazzy executive jets to customers in Africa and Europe. Other times, he tests such strange flying machines as the over-stuffed "Guppy" which now carries him hunks of snaccoraft to Cane Kennedy.

carries big hunks of spacecraft to Cape Kennedy.

When duty calls, Clay Lacy takes over as the calm, dependable, serious Captain of United Air Lines DC-8. Flying airliners must be very relaxing for this busy pilot—except when he pulls stunt like flying retired DC-7 in a 1,000-mile pylon race! And actually beating a bunch of Mustangs with it!

No doubt about it, this Clay Lacy likes to fly! And it doesn't seem to make a whole lot of difference what kind

of airplane, as long as it isn't like everyone else's.

Lacy spends more time in the roomy, comfortable seat of his DC-8 than he does in his more interesting planes, letting those mysterious little electronic things do most of the work. But he's best known for the brief, wild minutes when he pushes his No. 64 Mustang to its limits, tearing around the aerial race track at Reno, way out in the desert.

Clay was there on that historic day in 1964 when the late Bill Stead did what almost everyone thought was impossible: He brought back the National Air Races. The scene was a first-class dust bowl that used to be an Air Force helicopter training base. It didn't have runways or the other nice things that are needed for a fancy air race. But it did have a bunch of very enthusiastic people who were there to have the first really big air race in 15 years, and that was all that counted.

Lacy was one of the most determined of the bunch of rookies who were ready to show that they were every bit as good as the old-timers that people like to talk about. Roscoe Turner and Steve Wittman and Cook Cleland were great Unlimited pilots in their day, but this was a new day and there was a whole collection of new pilots ready to

become heroes.

Only—not everyone was so sure. For one, "Fish" Salmon wasn't sure that these new guys were such hot stuff. And Salmon was something of an expert: not only was he a big test pilot for Lockheed, but he had been a good enough race pilot I few years before to win the Goodyear Trophy with the classic, bronze Cosmic Wind "Minnow." Salmon knew what racing was all about, and he had some doubts about letting a bunch of inexperienced pilots loose on I race course.

If Salmon was worried, then a lot of other people were worried, too. But they had to give the new boys a chance to show how good they were, and Salmon was put in charge of the committee which would watch them do their stuff. Clay Lacy was the first to get a chance to show what he could do, and so I lot was resting on his shoulders.

One of the most important tests was rolling: A pilot had to do a slow roll to the right and then one to the left—without losing altitude. If he could do this, then he should be safe making racing turns close to the ground. Lacy took off and Salmon got on the radio to give him instructions. When it came time to do the slow roll to the right, Lacy roared down right over Salmon's head, in his purple Mustang, and did the prettiest eight-point roll anyone could have done. "Fish" and all the people around him were completely amazed. When Lacy called down over his radio and asked when he should do his roll-to-the-right, Salmon laughed and told him not to bother!

No doubt about it, this new guy Lacy was quite a pilot! And he showed it in the next few days of racing. Even though his Mustang was strictly stock, while some of the others had been souped-up for racing, Clay won enough points to place third, out of five Mustangs and three Bearcats. He didn't set the world on fire, exactly, but he did cause spark or two.

(Continued on page 46)

PYLON



POLISHER

by DON BERLINER

introduction to radio control

IMPLE, SATISFACTORY SYSTEMS CAN BE PURCHASED FOR ABOUT \$85 INCLUDING FINGINE, PLANE KIT, AND ACCESSORIES, IN THE LIBST OF A TWO PART ARTICLE THE AUTHOR EXPLAINS THE ULYBA SIMPLE THE AUTHOR EXPLAINS THE ULYBA SIMPLE THE STATE OF A TWO PART OF A TWO PER ATTING RUDDER AND THROUGH CONTROLS.

Y FRED M. MARKS





f you have been building control-line or rubber-band-powered models or, even non-flying plastic models, the urge to control by radio models that fly realistically will be almost certain. How does one get into radio control? It will be hard to get answers to your questions unless nearby group of R/C flyers is willing to help you. Since that is unlikely, this article has been written as if questions were being asked by the reader.

What is radio control, and how is an R/C model different from other types of models? Radio control permits any model-cars, boats, trains, airplanes, almost any vehicle imaginable-to be controlled remotely, that is, without the operator having to touch the model once it is started on its way. This is done by transmitting information over . radio wave in the same way as rock music is broadcast over an AM radio. The same things are required: a transmitter to send the information and receiver to accept and use the information. However, two new things are added: an encoder which performs the same function as a microphone, and an actuator which takes the place of loudspeaker. The amount of control varies with the complexity of the control system. A simple "pulse" system can give left and right rudder control while a complicated six-channel digital system can permit control of six different control functions-elevators, ailerons, etc.

Radio stations must have a license to operate. How about modelers? Yes, modelers who use radio control must be licensed, with one exception. Some transmitters are designed to have less than 100 milliwatts or 0.1 Watt output (you are familiar with the term "Watt" from the ratings which appear on household electric "bulbs") and may be operated without a license in the frequency band from 26.97 Megahertz (MHz) to 27.27 Megahertz provided they do not interfere with any licensed equipment. (One Hertz equals | frequency of one cycle per second. A Megahertz is one million cycles per second.) These are suitable for many models, but should not be used for model planes, due to short radio range. There are now two bands of frequencies available to modelers which require license. This license may be obtained without taking any examination. These frequencies are: 26.995, 27.045, 27.095, 27.145, and 27.195 MHz (in the 27 MHz band) and 72.08, 72.24, 72.40, 72.96, and 75.64 MHz (in the 72 MHz Band). Do not buy or operate equipment on other than the above frequencies unless you have the proper license. The proper license for these frequencies is the Citizens Band license for Class C. This license may be obtained in two ways at present. The most common way is by personal application. The proper application form may be obtained by writing to the Federal Communications Commission at Washington, D. C. 20554. Ask for Form 505. The license is for five years and costs \$20. The completed application


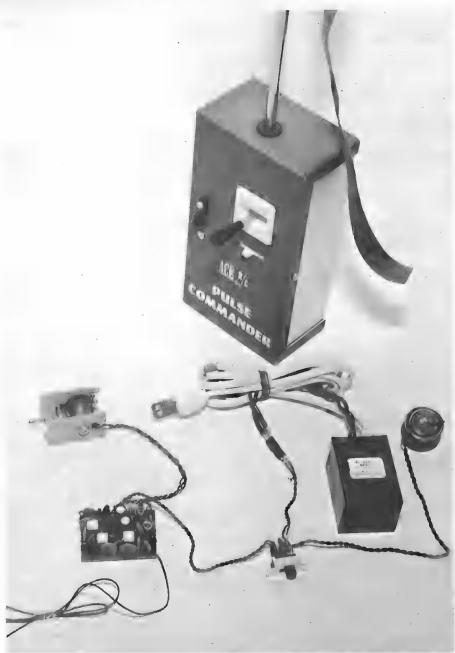


Fig. 1. L to R: Actuator, receiver, transmitter, battery charger and nicad batteries.

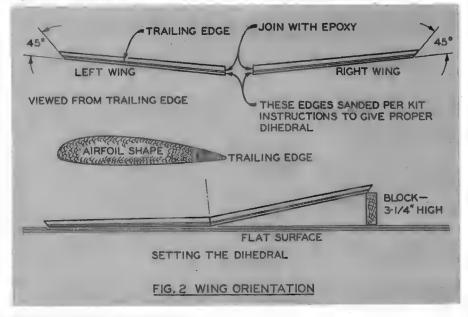

must be sent to the Federal Communications Commission, Gettysburg, Pa. 17325. Certain R/C clubs have taken action to obtain a corporate license whereby the club pays the \$20, obtains a license covering all its members and assumes the responsibility for the members' transmitters. This saves the individual modeler the \$20, but each member must be absolutely sure to abide by the F. C. C. regulations or risk the loss of the club license.

What is the best way to get into Radio Control? There is no one best way, for every modeler's interests are different, as are his enthusiasm, finances, and determination. The answer must reflect the viewpoint and needs of the modeler asking the question. The safest way is to start with the simplest, most inexpensive system, and with a boat or car; then, as experience is gained, to progress to a simple, inexpensive plane. However, if one has already flown airplanes very much, the concept of trying simple ground machine may lack appeal. Then the best way is the one least likely to result in loss of an airplane and equipment. (Later in this article we will present system and an airplane designed to meet these requirements.)

We read about so many of the different kinds of systems in the model magazines; which is the best? The best for you depends on your finances and interests. My recommendation for the fellow who has enough money is to purchase a digital system that will satisfy future needs as well, but to start out with a simple, inexpensive airplane which uses only one or two of the channels for control. Thus, it may be more practical to buy only one or two servos. Some of the small easily built models, such as the Goldberg Junior Falcon, Sterling Minnie Mambo, Midwest Lil Esquire, fly quite well when using only two channels of small digital set. These models have ■ big plus in that the small 049 engine they use will fly all afternoon on less than a pint of fuel. This is quite a contrast to a 60-engine-powered monster "big guys" fly, that consumes almost a pint of expensive fuel on every flight!

For the fellow who is solit cramped for funds, two routes may be followed. The ACE pulse system to be described later is one example. The second example costs about the same, but is a single-channel digital system sold by Controlaire as the Digit Migit. This particular rig has the advantage that it may later be traded in for more advanced equipment. It will require slightly larger airplane to carry the set, but 049-powered models listed above will suffice.

How do I learn to fly without smashing the R/C plane? If you have learned to use the equipment in ■ car or boat, some of the problems will be solved. One of the first such problems is

the sudden realization that, when the model is heading toward you, the controls are reversed. When this happens the airplane/car/boat turns the opposite direction from what was expected. Being able to get the model trimmed and balanced to fly, and the above problem, are the two most difficult hurdles for the raw beginner. The best way to learn is to have more experienced flyer teach you by first flying and properly trimming your model-if such a modeler is located nearby. It may help to obtain the roster of clubs from the AMA (Academy of Model Aeronautics, 806 Fifteenth St. N.W., Washington, D. C. 20005). Incidentally, if you aren't already a member, it is wise to join the AMA so that your model flying activities will be properly covered by insurance.

If it is impossible to get help in learning to fly or trim your model, then you must test fly it yourself. But first, write to ACE Radio Control, Higginsville, Missouri 64037 and ask for a copy of an article titled "Pulse Rudder-Only Flying Techniques." While it says "Pulse Rudder," this timely set of instructions is quite appropriate to flying any of the smaller R/C models which are operated on rudder-only control. (In a later issue,

we will provide detailed instructions on adjusting and flying.)

Hey mister, how much does that thing cost? The cost for getting started with the least expensive combination of radio, airplane, engine, and accessories will be about \$85. Not all this has to be spent at once. The airplane kit can be bought for about \$6. An engine will cost another \$7.50. With glue, dope, fuel, wheel, and a starting battery, the total airplane, without the radio, will be about \$16. The radio is the big cost item. The ACE pulse system or the Digit Migit cost \$69. (Yes, there are cheaper ways of getting into R/C, such as using escapements but I can't really recommend them unless there is someone to land a hand.)

Hey, there are still lots of questions you didn't answer! Right, but there will be more coming next issue. (Meanwhile, the basics can be learned by ordering a book for \$1.00, Getting Started in R/C, from Potomac Aviation Publications, 733 15th Street, N.W. Washington, D.C. 20005.) For now, let us discuss the pulse system. To avoid confusion, the way that pulse works won't be described just yet. Take our word for it, it works. The system used for example was designed specifically for simple, inexpensive flying: the ACE Pulse Commander. This system consists of a transmitter with the pulser (the encoder mentioned earlier) built in, ■ receiver, magnetic actuator, and nickel cadmium batteries. (See Fig. 1.)

The airplane we chose for this discussion is called "Dick's Dream." It is available from the local hobby shop or from ACE Radio Control. This is a tiny




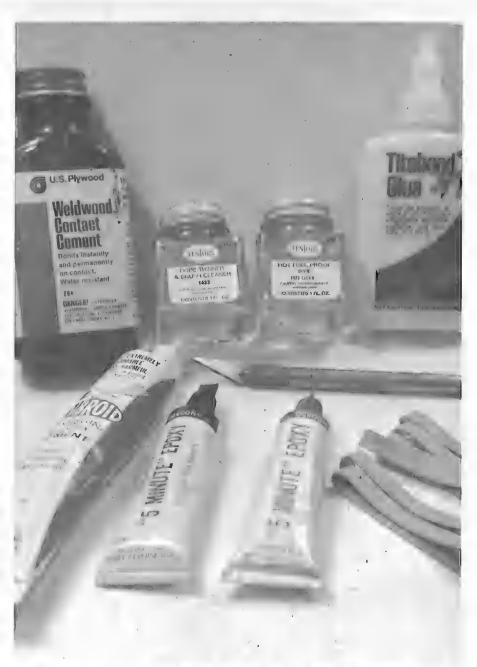


Fig. 3. Extras required include dope, thinner, glue, cement, balsa knife, rubber bands.

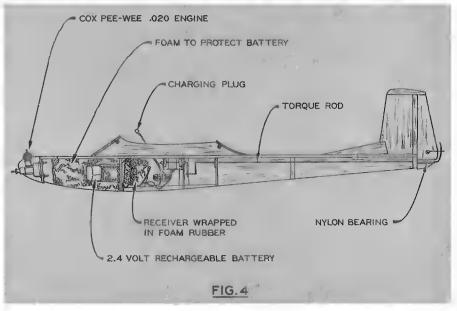

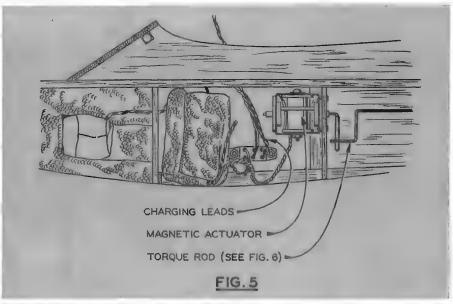

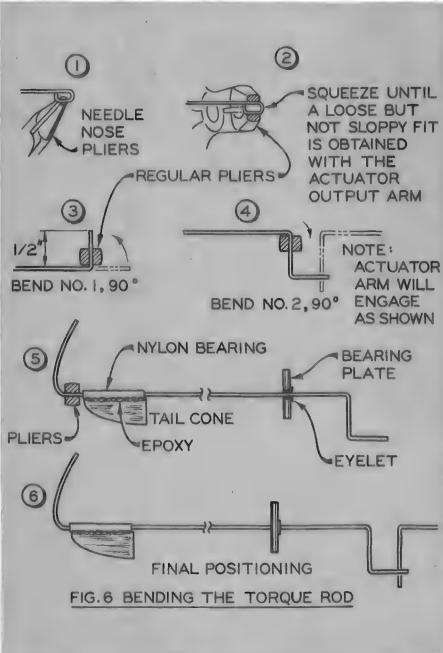

model designed specifically for the small pulse rigs. It is ideal for the beginner because a tiny model is almost impossible to damage if flown over moderately deep grass such as a pasture. Flying a model over meadows is not recommended because it can easily be lost in tall grass, wheat, etc. Don't scoff! A favorite model of mine, almost five feet in span, required an hour to find, and it was known to be in an area about 100 feet square. Searchers passed within four feet without seeing it nestled deep in the wheat, even though the model was bright red!

As it arrives in the box, the model kit consists of a set of shaped styrofoam wings, and balsa and plywood parts for the fuselage and tail assembly. Note that both wing panels are exactly alike, and remember constantly as work is done on them that one must be made a right hand wing and one a left. The plans and instructions provided are extremely clear, but it is easy to forget. Consult the simple diagram in Fig. 2.

Before the diecut balsa parts are pushed from the balsa sheets, they should be carefully identified from the drawings on the plans and marked with a pencil, because they have no identification numbers printed on them. There are certain tools and materials that will be needed before starting. An X-Acto knife is nice, but ■ single-edge razor blade will do. Model cement, such as Pactra, Testors, or Ambroid will be needed. Do not use plastic cements intended for assembly of plastic models. Contact cement such as Weldwood is most useful for fastening doublers (a doubler is an extra thickness of material) to the fuselage, but model cement will do.

This next item will cost another dollar but can be used for many models: Devcon or Hobbypoxy five-minute epoxy in tubes. Use the epoxy to join the wing halves, to mount the firewall and landing gear, and to coat the entire engine compartment for protection against fuel. Clear dope with talcum powder mixed in makes a good filler for the wood surfaces prior to color painting. (Use one part talc to five parts clear dope.)

Follow the painting instructions provided with the model. Don't use any cement on the foam wings except epoxy or white glue. Other cements or glues will melt the foam and ruin the wings. Some of the things mentioned may not be familiar, therefore, we assembled the parts mentioned, Fig. 3 shows what should be brought home with the kit in order to put it together. This photo is not an endorsement for particular brands, and merely illustrates the things to look for at the hobby shop.

If it is assumed that the R/C beginner has some experience in building models, then the most difficult task is that of properly installing the equipment. To help you with this, the right half of Dick's Dream was built and the equipment installed. Fig. 4 shows the overall installation with all items identified. It shows where the equipment should be positioned, where foam rubber is required for protection, and



The magnetic actuator which moves the rudder by messes of wire torque rod (not shown). Two plywood pieces are for mounting purposes.

the torque-rod connects actuator or servo with the rudder. Fig. 5 is a close -up of the equipment compartment showing the routing for wires.

Some notes on these figures will help avoid problems. Starting from the front, the battery pa k must sit in a pocket in the foam rubber as shown. This foam is best installed before the fuselage bottom is put in place. The receiver must be wrapped in foam rubber, at least 3/8 inch thick, and placed with the bottom of the printed circuit board of the receiver toward the forward bulkhead. Tie ■ knot in the receiver antenna 2-1/2 inches from the receiver before inserting the antenna through 1/16-inch hole drilled in the fuselage side. Be sure to place large washers under the screw heads which hold the switch in place on the outside of the fuselage. Although not shown on the plans, the precaution was taken of adding wood rails crosswise to the bottom of the cabin to hold the actuator bulkhead more firmly. Also, the actuator bulkhead is free to move up and down and should be restrained by spot cementing at the top on each side, Don't glue the whole assembly in place because it is convenient to be able to remove the switch and slide everything out to use in another model.

The torque rod may be a little difficult to bend and this actual operation isn't shown in the instructions. Fig. 6 is provided to show how the bending is done. The actuator arm actually holds the front loop where it belongs, so, in performing step 5, carefully check the location for the bend at the tail with the arm engaging the torque rod. Then disengage the actuator arm and slip the torque rod back, so that the bend can be made to come out exactly at the rear end of the nylon bearing when the actuator arm is engaged, as shown in step 6. Solder or crimp an eyelet to the pushrod where it will contact the nylon bearing to prevent it's ramming forward in a collision. Note also, that the centerline of the actuator arm and the torque rod should align as nearly as possible.

Don't be alarmed if it seems that the preceding is not enough to build a model. The instructions provided with the model are very clear and this information is to help surmount a couple of rough spots for the beginner who hasn't built an R/C model before.



This toy styrofoam glider by Eldron Industries with plug-in wings and tall ■ easily converted to radio control by cutting holes in forward body for batteries and system.



he hand-launched glider probably is the most popular of all forms of model aircraft, Simple to build and fly, the "HLG" brings much enjoyment to the hobby. A good model can be built in as little as a couple of hours, and should not require more than a day or evening if you work slowly. That really depends on how long it takes the cement to dry. Once you have mastered the technique of throwing your glider you will obtain many fine, long flights-and it is quite possible you will know the excitement of catching a thermal (rising warm air current) which could carry the craft out of sight. So be sure to put on it your name, address, and phone number.

The two models shown here (see full-size plan on the following pages) were created by the late Cal Smith, an internationally famous designer of all forms of model aircraft. The difference between the two lies in the wing dihedral. One model has the dihedral-angle break at the center of the wing, the other has a flat center section with both tips angled upward. Dihedral is always necessary in free-flying models to provide the necessary stability, or ability to fly without crashing in a descending spiral to the ground. Stable models return to a correct flying position whenever acted upon by some upsetting condition, such as a gust of wind.


Although "Flip" and "Flop" are simple models to build, they are rather lightly built for their size in order to increase their duration of flight to a maximum. The instructions and material sizes are printed conveniently on the plans. On the page at the right will be found tips on tools and assembly procedures, as well as flying instructions. So let's discuss possible points of difficulty in cutting out and working up your materials.


Note that the fuselage (body) is a $3/16 \times 3/8$ " strip. This strip should be medium hard balsa for strength, 1f you have difficulty obtaining this size wood, cement together two pieces of 3/16" sq. Use a few pins to hold the strips together until dry, or wrap them tightly with rubber bands which can be pulled away afterwards.


The wing is only 1/16" thick. Actually, you can substitute soft 3/32" sheet balsa if you wish without too much of a flight penalty. Lightly sand off any wood fuzz. It is enough to gently round off the leading and trailing edges on the 1/16" sheet. A super job results from sanding the wing to the cross section shown on the plan. This is hard to do with 1/16" sheet, not so hard with 3/32". The tail must be 1/16" sheet because models easily become "tail heavy." It is advisable to taper the body stick as suggested. Not to do so will require more nose weight for balancing, and less duration of flight,

A good glider really ought to be well finished, Mix about one ounce of clear dope with four or five drops of castor oil and enough talcum power to make a very thin cream-like substance. Before the wing and tail are glued in position, paint on a thin coat of your special finisher. After it dries, sand it lightly with very fine sandpaper, and then put on another coat. Bare wood creates extra skin friction or air drag. The smooth finish allows the model to slide through the air more easily. Do not paint the model-minimum weight is important. You can trim it with a touch or two of colored dope, or apply colorful decals obtained from your.

hobby shop. Have fun!

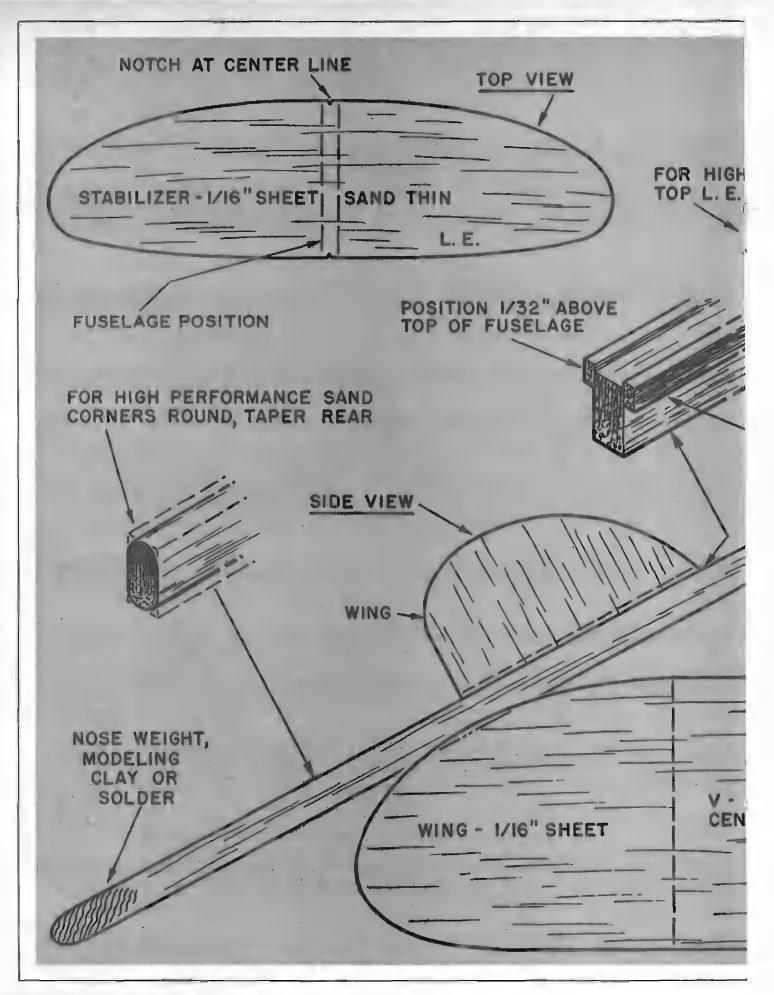

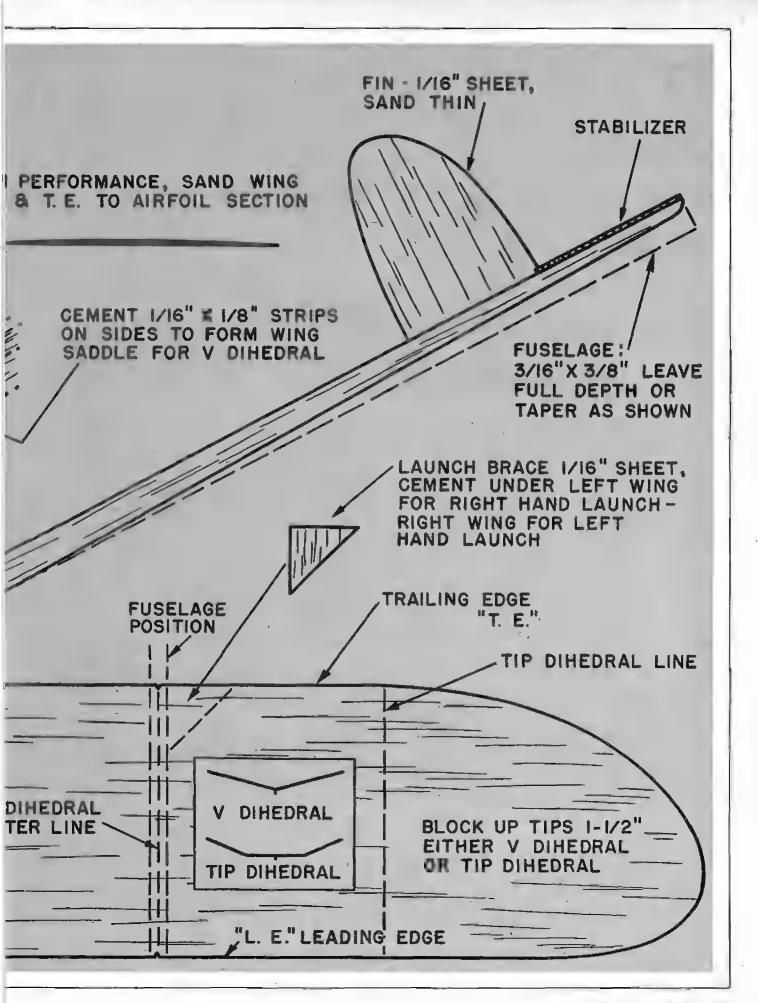

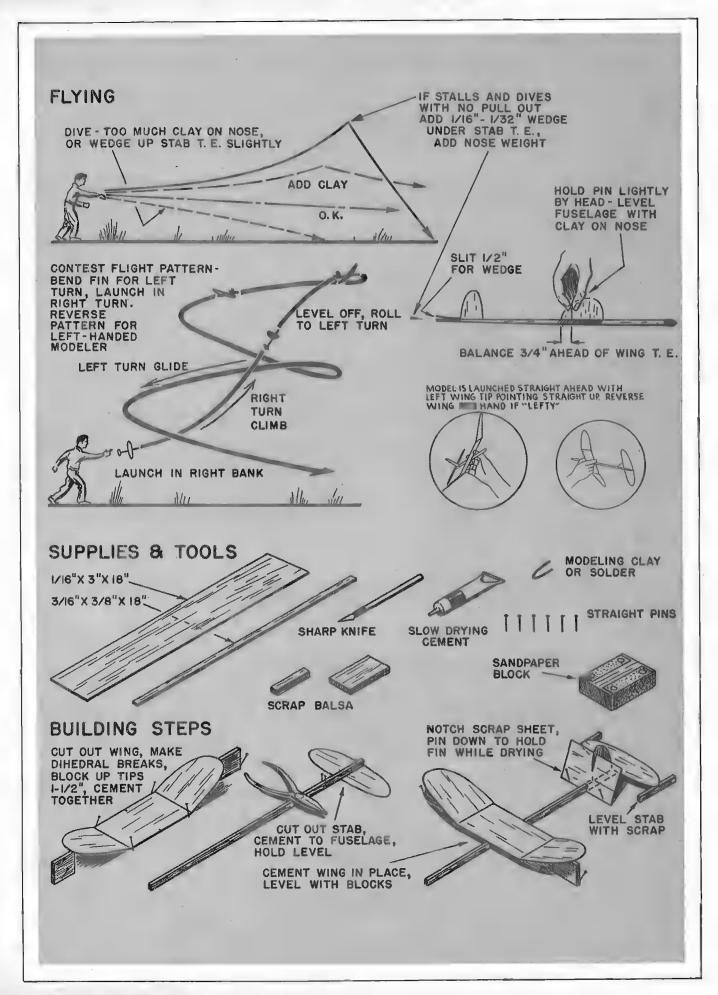



OVER 39,000 JOINED IN 1971 7,000 more than the year before!

YOU CAN TOO!

AMA* MEMBERSHIP OFFERS:

liability insurance - special discounts - official rules manual - competition privileges

magazine subscription • exclusive decals • aid to air youth • national recognition

Subscription to American Aircraft Modeler is included with AMA adult membership-includes AMA news. Members under 19 can purchase the magazine at a special, low, AMA rate.

Discounts on special items stocked by AMA Supply & Service Section-books, magazines, pins, decals, etc.

Official Rule Book included with all AMA memberships. This manual details the specifications by which different types of models are built and flown and clarifies most of the specialized model aviation terms-a real aid to understanding model magazine reporting.

Super Decal Sheet-three different 4" x 9" sets. AMA wings, FAI emblems.

*The Academy of Model Aeronautics—a non-profit organization. organized in 1936; guided by regional officers elected from among the membership. National headquarters is in Washington. D.C. AMA members have privileges in other organizations: National Miniature Pylon Racing Association (NMPRA) open only to AMA members. Membership in the Nat'l. Free Flight Society (NFFS) is \$1.00 less to AMA members. All AMA members are automatically part of the National Aeronautic Association (NAA) and the Federation Aeronautique Internationale (FAI); may become voting members of NAA-with other special benefits-for half price, and may obtain an FAI sporting licensefor international competition.

Liability Insurance is included with all AMA memberships. Bought separately, this insurance would cost more than the adult AMA membership fee. Coverage is for \$300,000!

Competition Privileges: All AMA members are licensed to enter the National Model Airplane Championships and all other nonrestricted meets (over 500 each year-fun-flys, local, state and regional meets, and record trials); to establish national and international records; to compete on U.S. teams in World Championships (two held per year).

Special Help for Youth Members: Membership fee, with full competition privileges, eligibility for AMA scholarships, only \$2.00 for either Juniors (up to 15) or Seniors (15 thru 18). (Does not include magazine subscription-cost with magazine subscription only \$5.00.)

TO JOIN AMA USE THE FORM BELOW: AMA membership ends each year on December 31, regardless of the date a membership application is received. Late-year membership policy is follows: those who apply between August 1 and September 30 pay full one year rate, but will receive half-year credit toward the next year's membership-they must, however, use this credit by July 1 of the next year; those who apply between October 1 and December 31 pay full one year rate and receive full membership for the following year, plus whatever days of membership remain in year of application.

APPLICATION-1972 A.M.A. MEMBERSHIP

Academy of Model Aeronautics, 808 Fifteenth St., N.W., Wash., D.C. 20005



Member of chartered club? Important-write in club name here

FOR THOSE 19 OR OVER BY JULY 1, 1972 Includes all membership and competition privileges—and American Aircraft Modeler subscription. □ OPEN\$10.00					
□New	Renewal (number)				

FOR THOSE NOT 19 BY JULY 1, 1972-Check One Only!
FILL IN DATE OF BIRTH MoDayYr
Includes all membership and competition privileges— except American Aircraft Modeler subscription.
☐ SAME AS ABOVE—with subscription\$5.00

	19.'2 Memb	ership expires Dec. 31, 19
Name		HQ use only
Address		
City, State	_ Zip	
Ciry, State	21p	



26 November-December 1971


FRANK GENTY

world's in the world of its color the

the first of the United to the United to the United to this a still to the United to this a still to the United to discarded at a sur flight).

individual in the control of the con in, alter and true members of the problem is 8 m/ly file tradition as I demodel of the alter a 't a' a alter the culture as kylicus, wo file SECRETORY.

Building engine holder. Adapter rings center engine in the body The wire retains engine.







The shock cord mount is placed in Tracing the line pattern for the fin the body tube and glued. Parachute also connects to nose cone.



position, launching lug, Marking guide comes in the kit.

Youth rocketry was not always that safe, however, and one shudders at the thought of the "dangerous years" when space-oriented youngsters—their imagination fired up by the Sputnik I breakthrough and subsequent U.S. and Russian achievements-endangered themselves, their relatives, their friends, and their neighbors by concocting exotic, and highly unstable, rocket fuels.

In those early years when a newspaper told about a young rocket experimenter, it was usually a tragic story-like the boy in California who loaded ■ metal pipe with match heads which exploded, killing him instantly and crippling his friend for life—or the teacher who was killed. and seven of his students injured, when he filled an improvised rocket with explosive chemicals. Still another case involved a young man who lost an eye as he was placing hazardous chemicals in a CO₂ cartridge.

These were the days of the "basement bombers," and the Institute of Aeronautics and Astronautics estimated that each of these experimenters had a one-in-seven chance of being seriously injured, or killed, for each year he continued to gamble with home-brewed fuels.

Then, in 1958, a significant event occurred that was destined to practically eliminate the "basement bomber" and his dangerous practices, and make youth rocketry perfectly safe hobby. It was the advent of the massproduced model rocket engine, the brainchild of Vernon Estes, then a resident of Denver, Colorado.


Deeply concerned with the well-being of the thousands of youngsters who had caught "space age fever" and were in danger of paying a high price for it, Estes, an expert in the electrical engineering field, went to work designing and building a machine that would turn out model rocket engines safely and automatically.


The result was "Mabel," a prima donna who, when happy, made and inspected one model rocket engine every 51/2 seconds. It was instant success, and the rest is history. Vern Estes branched out into model rocket production, moved his business to Penrose, Colorado, and today is President of Estes Industries, a subsidiary of Damon Corporation and the world's largest manufacturer of model rockets and supplies.

Safe to handle and safe to use, the basic model rocket engine that propelled Vern Estes to fame, so to speak, conforms to the Solid Propellant Model Rocketry Safety Code, which has been approved by the National Association of Rocketry and the Hobby Industry Association of America. For one thing, a model rocket engine cannot contain more than 113 grams (4 oz.) of propellant.


No matter what their thrust capabilities, model rocket engines have the same basic construction. The casing is made of tightly wound paper which houses the following components:

Paper pattern, metal rule, balsa knife, are used to cut the fins from sheet balsa. Must be true. Gluing the engine holder into the cardboard body tube. Metal retainer for the engine shows clearly.











Gluing screw-eye to nose MIND.

Both the elastic shock cord Indiparachute cord attach to this eye.

(1) A ceramic nozzle which allows exhaust gases to escape during flight, producing thrust.

(2) A high-thrust charge for liftoff and acceleration. This charge is made of solid fuel mixed with an oxidizer which provides the oxygen needed for the fuel to burn in the atmosphere.

(3) A non-thrust delay and smoke tracking charge which enables the rocketeer to follow his bird's flight.

(4) An ejection charge for the deployment of the recovery system.

(5) A retrainer cap made of clay, to hold the comonents.

Model rocket engines vary in sizes and/or propellant content to produce the total impulse (total power) needed to attain maximum altitude. For instance, taking an 0.8 oz. Estes Alpha model rocket as ■ test vehicle, ■ 1/2 A6-2 engine will lift the bird to about 110 feet. Change that to an A8-3, and the rocket will reach 350 feet. Now try ■ B6-4, and watch the model soar to 650 feet. Altitudes of around 2,000 feet are not uncommon, and speeds can easily top 400 miles per hour.

The engine, held securely in the rocket by retainer hook, is electrically ignited with a short length of nichrome wire (of the type found in toasters) that has an extra high resistance section in the middle. Surrounding this high resistance area and extending out slightly along the leads of the igniter is a plastic coating which serves as electrical finsulation to prevent the igniter from touching itself and short circuiting. In addition, the coating will burn when the nichrome wire is heated to 1,000 degrees F.

Once the rocket's launch lug has been slipped over the launch rod and the rocket has been lowered into position on the launch pad's deflector plate, the rocketeer attaches the micro-clips from a launch control system to the igniter. The launch control system, which usually operates on 12 volts, has a safety key or switch that prevents accidental firing. Standing at least ten feet from the rocket, the rocketeer inserts the key or turns the switch, makes sure that the continuity light comes on, and then starts his countdown just as it is done at the Cape, "".5..4..3..2..1..liftoff!" And as he presses the launch button, his bird streaks away from the launch pad and heads for the sky.

Engine burn-out occurs about second later, when all the propellant in the engine is consumed, and thrust stops. Coasting now, the rocket continues on its skyward flight path, but slows down as the delay charge—ignited by the propellant—burns and leaves a smoke trail for tracking.


Reaching its apogee (peak altitude), the rocket turns over and starts to dive. Then, as the ejection charge is activated at the end of the delay (which lasts only I few seconds), the nose cone pops out of the body tube to de-

Tying the shock cord to eye— Shock cord is carefully tied to newscrewed and glued into nose. Cone cone which is ejected by gas presslips into the body tube.

sure to release chute.











This rocket is being given a base coat of white. It is important to avoid excess weight.

The finished bird. The engine, not shown, is propellant charge in fireproof paper housing.

ploy the recovery parachute or streamer. Soon the rocket lands softly, ready to fly again as soon as a new engine has been installed and a few squares of flame-resistant wadding have been placed in the body tube to protect the parachute from the hot ejection gases,

Sounds exciting, doesn't it? It is! And getting started in model rocketry is a fairly simple matter, as well as one

that's easy on the pocketbook.

For instance, a popular beginner's model such as the Estes Astron Alpha costs only \$1.50. For the same price, you can buy the Estes Alpha III, which has ■ plastic nose cone and plastic fins for easy assembly. It will take you just a few hours to build and paint the Astron Alpha (including drying time). The Alpha III can be assembled and painted in less than an hour.

For the youngster who would like to have a complete outfit as he embarks upon the great model rocketry adventure, there are beginner's kits that contain all that's needed: rocket, engines, launch pad, launch system, beginner's brochures, and even knife, sandpaper, glue, paints, and

brushes. These kits cost less than \$10.00 each.

After he has mastered the basic rocket building techniques and launched his bird a few times, the rocketeer has a tremendous choice of models that offer various degrees of challenge—models that range all the way from accurate scales of the multi-stage rockets that paved the way for our moon-landings to highly imaginative ones that could be the forerunners of the space vehicles of tomorrow. For instance, Estes makes an Orbital Transport which has a glider riding piggyback on the booster rocket. The Orbital Transport itself lifts off under rocket engine power. At parachute ejection, the "re-entry vehicle" detaches and glides back to earth while the booster returns by parachute.

From the single-stage rocket, a young enthusiast can graduate to the two-stage models, built to demonstrate how real space ships operate. In a two-stage rocket, ignition of the engine in the lower stage launches the entire model. This engine, called "booster engine," has zero delay, meaning that it has no delay and ejection charges.

At burn-out, the hot gases leaving the front end of the engine casing ignite the engine in the upper stage. At that very moment, the lower stage separates from the model and falls away while the upper stage engine takes over and propels the rocket to its maximum altitude. The lower stage gently tumbles and lands softly enough so that it is not damaged. The upper stage has the usual parachute or streamer recovery system deployed by its engine's ejection charge.

More advanced three-stagers, such as the Estes Farside, can come later—high-flying multi-stage model rockets are definitely not for beginners.

One way to have lots of fun with model rocketry is to

The finished rocket is whirled on a string to test it for proper stability.



fly birds that can carry a payload. The payload compartment, located between the nose cone and the body tube and often made of transparent plastic, can accommodate live specimens such as grasshoppers, flies, splders, earthworms, beetles, crickets, or guppies. The advanced rocketeer can study the effects of acceleration on the passengers by carefully developed experiments involving these specimens before and after launch. However, the use of mice or hamsters as live payloads is frowned upon.

What about launching an egg? Yes, an egg! And a raw one at that! To fly and safely recover a raw egg presents quite I challenge; and if you fail, you have a scrambled egg in your payload compartment. But it's fun to try. One such "egg rocket" is the Estes Scrambler, which is powered by three engines mounted in a cluster. This bird can take the egg to over 1,000 feet, and then bring it back to earth uncracked thanks to dual parachutes.

Recently, mew type of payload has been introduced which opens a brand-new world for the advanced rocketeer; miniature electronic instrumentation that transmits valuable data while your bird is in flight. These Rocketronics items include a transmitter that emits an electronic beep enabling the rocketeer to locate model lost in tall weeds; a sensor that tells you how fast your rocket is spinning; and a microphone that allows you to hear all the sounds associated with the flight.

Then there are aerial model rocket cameras, such as the Camroc and the Cineroc, which let you photograph the earth from way up there. The Camroc takes single black-and-white photo from hundreds of feet in the air, and the CINEROC shoots Super 8-mm color movies from well over 1,000 feet, capturing on film the spectacular happenings from blast-off to separation and recovery.

Yes, youth rocketry has indeed come a long way since the world's first artificial satellite launch stirred up the imagination of America's younger generation. Today, model rocketry is safe, fun, and scientific. It is the fastest growing recreational activity, and at the same time it serves a valuable function as a teaching tool in the classroom. Model rocketry can help demonstrate many principles associated with physics, mathematics, aerodynamics, optics, biology, astronautics, and electronics—and as such occupies an important place in many a school's curriculum.

For the beginning rocketeer, however, the whole idea is to build and launch model. And for sheer excitement, nothing matches watching your sleek bird speed toward the sky and then, a few moments later, seeing the parachute blossom out. This is your rocket and, as far as you are concerned, it's the very best, the prettiest, in the world. And as you pick it up after it has gently landed you know that you are hooked. You are now metrue model rocketeer—and you have just proved it.



THESE 200-YEAR-OLD MODELS PROVED MECHANICAL FLIGHT POSSIBLE AND INSPIRED THE YOUNG WRIGHT BROTHERS.


ou know that the Wright brothers developed the first practical, man-carrying, he avier-than-air flying machine, and made the first successful flight on December 17, 1903. Sure. But do you know what originally fired their imagination with the possibility of mechanical flight? A toy helicopter. In 1878, when Orville was seven and Wilbur eleven years old.

Helicopter? In 1878? That's right; about the time your great-grandfather was in fifth grade, Bishop Wright bought a toy helicopter for his sons and triggered a line of thinking that was to change the world, and is still doing so. The toy was based on the 1870 designs of Alphonse Penaud, a Frenchman, and what may be even more surprising is that his design, while including one important invention, was a modification of something almost 100 years older!

A working model helicopter at the time of the American Revolution? Right again. The story goes like this: In 1768, Paucton, a French mathematician, proposed what he called a "pterophore" which had one airscrew to lift it and another to drive it forward. There is no record that either a full-scale, manpowered machine, or a model, was ever tried, but apparently the idea inspired two more Frenchmen, Launoy and Bienvenu. They invented what they called an "Automoteur" (I call it a Feathercopter, or obvious reasons) and demonstrated it to the French Academy of Sciences in 1784. As one history book states, "it held their attention." It should have, for this was the first known machine capable of lifting and sustaining itself in free flight. It proved that mechanical flight was in fact possible, something that no one was entirely sure of up to that time. It was not a kite, depending on the wind to hold it aloft. It was not a glider, which cannot rise except on thermals and strong upcurrents. It was not a boomerang or missile, which must be thrown. It was a true flying machine, lifting its own weight by means of its own whalebonebow power source.

Sir George Cayley experimented with feathercopters in England in 1796 (George Washington was still President) and doubtless many other inventors as well, but no real improvements were made until 1870, when Penaud redesigned it to two-bladed form. Much more importantly, he also invented the rubber-band motor, and it was this development that made the difference between something that merely worked, and a practical flying model capable of remarkable performance.

The Histories say that a feather-copter will "rise to the ceiling," and that is just about all the author's reconstruction is able to do. That it flies is certain, but 5-second flights are not too impressive nowadays. On the other hand, Penaud's helicopters (the term had been coined in the 1860s) would "rise to 50 feet or more... for a period varying from 15 to 30 seconds." They still do—and much more. That, along with the difficulty of obtaining good feathers, is the best reason for building a

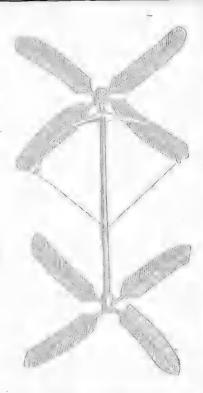



"Automoteur" of Launoy and Blenvenu of 1784. Actually, whalebone bow was attached to lower corkhub.

Reconstructed Automoteur by author has 1/4-in. dowel, wine-bottle cork hubs, 1/16-in, wire bow, Mallard feathers.





Modernized Automoteur has cork hubs, balsa frame, Mallard feathers. Autorotates down in upright position.

Same III the model above, but with balsa blades patterned after feathers, Climb is slower but still impressive.

Penaud model. If it started the Wright brothers thinking, what might it do for you?


Construction of the Penaud is very simple. The most important point, perhaps, is in selecting good balsa. The 1/8th square for the frame must be as straight-grained as possible, and the harder, the better. If you feel the balsa begin to crush as you pinch it, look for something harder, it probably won't take maximum wind-up without twisting badly and possibly even breaking. Pre-glue all joints and after gluing spread a cement skin over the joint area as a final strengthener, especially around the balsa-aluminum hub.

For a good, close-fitting joint at the hub, first cut a shallow "V" along the length of the balsa component. Then wrap a piece of fine sandpaper around the tube and work it back and forth until the "V" is transformed into an arc which exactly conforms to the curvature of the tube. For the upper, fixed hub, the tube is simply glued in place. For the lower, driven hub, the wire shaft must first be inserted, bent over, and embedded before the tubing is glued one. And don't forget the washers.

The blades should be of soft or medium 1/16th sheet. It is important to remember that you are dealing with a "pushme-pullyou" affair where the upper prop is right-handed and the lower left-handed. (The "handedness" of a propeller is determined by the direction it rotates when you look at it from the engine-side, with the slip-stream in your face.) Or you can call them tractor (upper) and pusher (lower). Anyway, they rotate in opposite directions (obviously) and be sure the 1/8th roots are glued on in such a manner that both props have a slight amount of dihedral. (The blades tilt upward from the center as do some airplane wings.) So be sure to set them up as shown on the plan. Without such dihedral there is an excellent chance that, upon launching, the Penaud will rise a few feet, tilt over, and quietly dive into the ground, which is not good either for the model or your morale.


The Penaud will fly perfectly well with simple flat-plate blades—in which case you should use 1/32nd sheet balsa—but for noticeably better performance the blades should be given something like an airfoil section (like the cross-section of a wing). It needn't be very exact; just sand I bit off the leading edge and rather more off the trailing edge. This treatment reduces the weight to that of the 1/32nd flat-plate blade, and in addition offers the advantage of a true lifting airfoil. The glue at the root-joint will also curve the blade a bit.

The roots should be rounded slightly on the corners and the ends. Just enough so that, when pushed into the hub-tube, a good, tight fit results. This fit will remain firm for many flights and adjustments, but eventually it will loosen. When it does, just sand a bit more off the root, then bind it with a turn or two of masking-tape to bring the

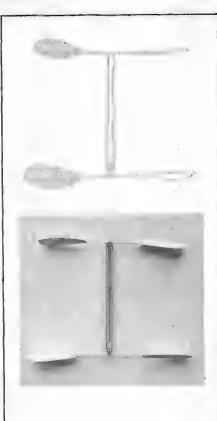

Penaud design of about 1870. Note triangular hub structure. Bat-wing blades probably bamboo, tissue.

Author's Penaud Feathercopter. It has fast climb, but will not autorotate smoothly to earth like 4-bladed types.

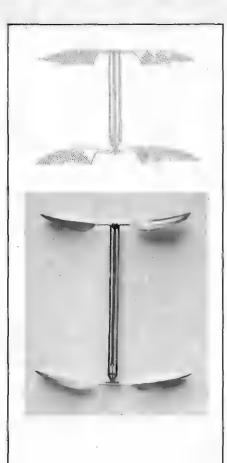

Another Penaud type of about 1870. Hub from metal tubing. The blades were made from cut-down feathers.

Author's reconstruction of the Penaud shown above. Balsa blades, low rpm, very stable. Three rubber loops.

diameter back up to tight-fit dimensions. Or make ■ new root; it isn't that difficult.

No dope or finish of any kind is used. It only adds unnecessary weight.

At least two loops of 1/8th flat rubber are required for a good climb, and are more than enough for back-yard or indoor flying. If you have a big field available, try three, or whatever you think the frame will take. The more power, the higher it goes; it's as simple as that.

For first flights, set the upper blades at about a 30-degree angle and the lower at somewhat less-say 15 or 20-degrees. This is a good "normal" setting for strong, stable climb, and unless the props are wildly unbalanced or the shaft way out of line, should produce that rarest of all flying phenomena; a good first flight. If it tends to wander about in circles, that means the blade angles are not the same. You can use a protractor to set them, or course, but the human eye is capable of amazingly fine angular discrimination, and setting the blade angles by simply eyeballing it is usually good enough. Just be careful. Now wind it about as much as you think the flying area allows, and watch out for the wind; the Penaud drifts with

And then you're on your own, just as Penaud was. The variable-pitch feature makes the model a virtual flying laboratory, capable of demonstrating far more principles of stability and aerodynamics than it is possible to discuss in this article. But here are **m** few things to try and then think about:

The setting of high pitch on the upper blades and low pitch on the lower blades produces a stable climb. What about the reverse? That is, low pitch on the upper blades and high pitch on the lower. Try it and see. And what happens in the following cases:


Upper blades 30 degrees, lower blades 0 degrees? And the reverse? Upper blades 90 degrees, lower blades 30 degrees? How about the reverse?

Both sets of blades at 9 degrees, so they act like tiny, revolving wings, not like propellers.

One set of blades at 30 degrees normal, the other at a very slight negative angle, so it actually fights the normal-setting blades.

Which if any of these settings will produce a steady, non-climbing hover? Yes, it can be done, with enough careful adjusting.

And so on. And when you've exhausted these possibilities, you might try different blades shapes and sizes: paddle-blades or bat-wing blades, like those of Penaud. Almost all modern nelicopters use straight, non-tapered blades—how about them? What about reverse-taper, that is, toward the hub? And what if the roots are longer for one set than the other? The Penaud paddle-blade model is set that way, with the upper blades having a slightly smaller diameter than the lower. Why did he do that? There's a good reason for it—try it, and learn something, and have fun at the same time.

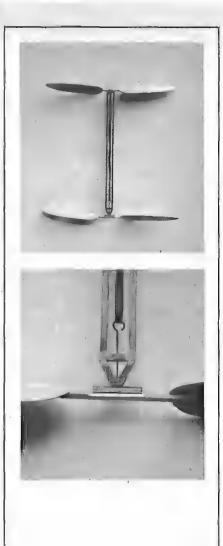

Author's modernized Feathercopter based on Penaud design. Full-size plans appear in continued section.

Close-up of the construction of propeller hub, and nose. This model has the best all-around performance.

to folk to it a The control of the case to the

The since the are all allows to allows the a

a was na Chairman and a tribation of the state of the sta The contract of the second of the contract of the second o As solvent to it the remaining to the re

to some the new of and All to a to some the new of and All to a to some the new of and the total to a total total

The probably of the first fluctions of the property of the first fluctions of the fluctions of the first fluctions of the first fluctions of the first fluctions of the fluctions of th

where the control of the control of

with one sugars

in the country of the thests

in the country one that the

interest is migned to being then the surfaces will then the surfaces will the surfaces will the surface to th

his to the state of the state o

The ment of the state of the st

and the prince the account of the same and t

ingle out of thick illy as thick illy as an analysis of the as an analysis of the asternation to the same of the s

politically and the second of the second of

While proving the affice of the proving the affice of the

are complete, to the term of the property of t

" Un out with and and all of a line of this order of the line of t

such a the figure of the such as a such a su

China and country to the plant of the stand of the plant the plant the stand the stand

The initial class of months of the initial cannot be in the initial cannot be in the initial cannot be in the initial cannot be initial ca

with of an antituty in the problem of the problem o


We for a notice of the control of th


againteann abh



air model manual

ADJUSTMENT OF FREE FLIGHT GAS MODELS

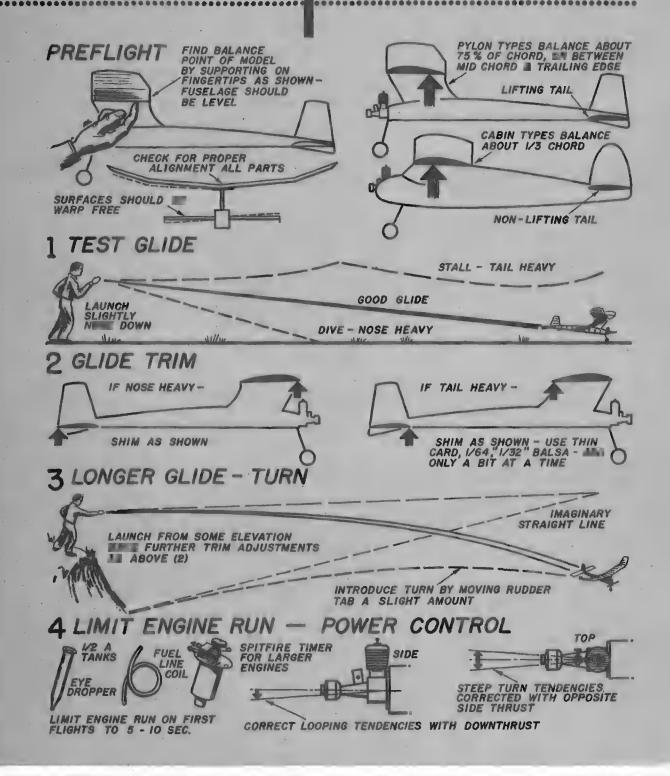

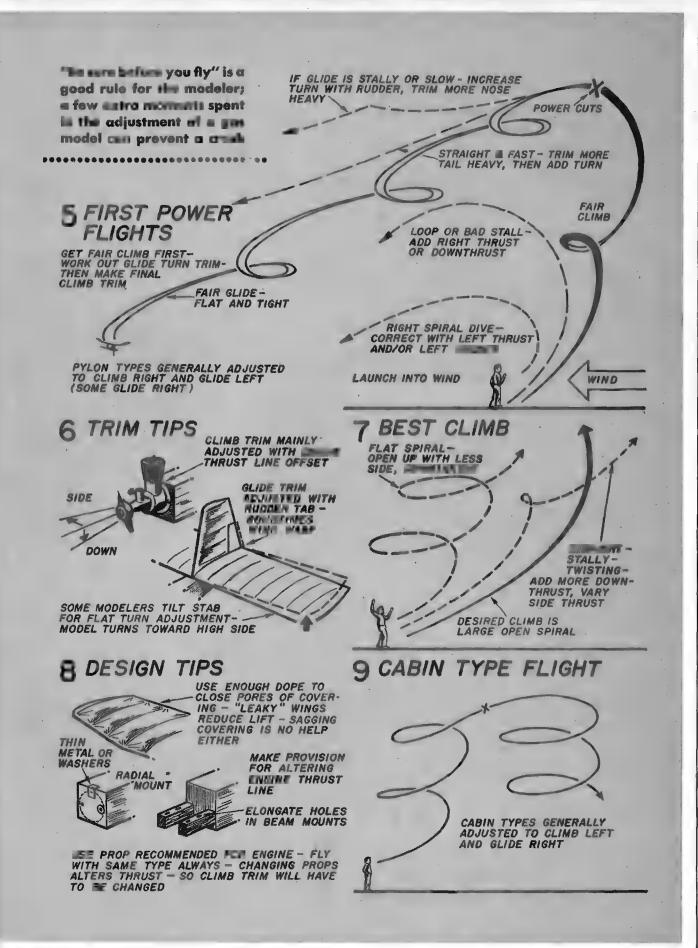



HERE'S A GREAT SCIENCE PROJECT—USE YOUR MODELING SKILLS TO DEMONSTRATE PHASES OF THE MOON, HOW SEASONS OCCUR, AND ECLIPSES OF SUN AND MOON.

hey called him I liar. And he did not really believe the story himself. Herodotus, called the "Father of History," felt duty-bound to report the story of the early Egyptian explorers who said that the sun was to the north as they rounded the Cape of South Africa.

As conscientious reporter, Herodotus recorded the position of the sun as described by those early explorers, but no one believed it and the information was lost for

almost 2,000 years.

With your own Earth-Moon Gizmo, you can show why Herodotus' report was accurate, even though he was not too sure of the story himself. The E-MG demonstrates some things which would have made life less confusing to ancient scholars.

Modeling astronomical objects requires astronomical scales. The approximate scale of Earth-Moon Gizmo is 1 in 250 millions—and I still had to cheat on one dimension!

Maybe it is easier to think of the scale as one inch equals 4,000 miles. Then an 8,000-mile diameter earth becomes a handy two-inch ball, and the 2,000-mile lunar diameter reduces to a mere half inch. However, the distance from earth to moon (240,000), scales to an awkward five feet, so this distance is "cheated" down to 18 inches.

The sun's distance from earth (93 million miles) would come out to about 2,000 feet. This problem is completely ignored in this model. A lamp set six or eight feet away

serves as a sun.

The Earth-Moon Gizmo can be used to demonstrate phases of the moon, how seasons occur, and how eclipses of sun and moon would look from space. With the size of the moon's orbit reduced still more, it makes an attractive con-

versation piece for desk, wall or ceiling.

The most difficult portion of constructing E-MG is mapping the earth. It is suggested that the ball be painted blue before marking in the land. The pattern provided is suitable for a two-inch ball. I used an expanded polystyrene ball swiped from a toy. If the ball you use is not two inches in diameter, the map pattern can be photostated to scale. Wrap the pattern around the ball, holding it on with pins and tape. Transfer the outlines by pricking through with a pin. You will find that the pattern is not a perfect fit (an inevitable consequence of trying to draw a spherical surface on a flat piece of paper), so some artistic license in drawing the outlines is allowable.

An atlas will help the painting process. Look for deserts; paint them light tan or pink. Look for mountains with snow caps; build them up with thickened paint. The atlas can be most distracting. Who could avoid a minute's daydream when confronted with names like Tahiti, Sarawak or

Tahanarive?

The moon should be one-quarter the size of the earth. I used slightly undersized rubber ball painted with very thick, white military flats. When partly dry, the moon was cratered by dabbing with pointed stick. The white was a bit too bright to be believable, so it was yellowed slightly with cigarette smoke. However, this hazardous substance is not recommended.

The earth is mounted on an axis made of coathanger wire bent according to the pattern on the plan. The bend is necessary to provide the 23½-degree inclination of the earth's axis from its orbit. Washers are soldered (or epoxied) in the positions shown. A two-inch-diameter disc is cemented to the axis to support the month dial, cut from the plan

I used masonite for the disc, but plywood, balsa, or even heavy cardboard will serve. When cementing the dial to the disc, care should be taken that the bend in the earth's axis is directed exactly toward the "summer solstice" line. by PAT MARCH

The moon is mounted on a 3/64 inch-diameter steel wire. The mounting was made up in three pieces as shown on the plan so the whole model could be disassembled and stowed within its own base. The joints are made from half-inch long pieces of 1/8-inch brass tube, flattened to fit, and soldered in place. The end of the wire opposite the moon is bent around another half-inch long piece of 1/8-inch tubing, and soldered in place. The wires should be bent slightly to bring the moon into the plane of the earth's equator.

A very attractive base for the model was made from two margarine tubs (Nu-Maid). The lids were fastened together with four small nuts and bolts as shown on the plan. A few holes stabbed thru the lids with the point of a knife serve as places to hold the earth's axis and the moon wires for storage. The earth itself merely drops into one of the tubs—or a special compartment inside could be constructed, if desired. For wall-mounting, a single tub and shortened moon arm is recommended. Simply tack the lid to the wall, and snap the tub in place.

A 3/32 inch-diameter hole is drilled in the exact center of the upper tub to accept the earth axis. A small metal tab screwed to the tub serves as an index for the month dial. The usual coathanger wire is slightly fatter than 3/32, making it

comfortably snug fit in the tub and in the 1/8 tube on the moon arm. Since the fit is so close, any burr on the ends of the axis will prevent the wire from fitting. The burr can be removed by filing to a rounded point.

The best "sun" is a high intensity reading lamp, but a 100-watt bulb also serves well. A piece of cardboard screening the 100-watt bulb, with a one-inch diameter aperture cut in it makes sharper eclipses. For demonstrations, the sun should be set up level with the earth. The model's base should be turned so the shadow of the dial

index falls toward the center of the month dial.

Let's see what can be learned from this set-up. Turn the vernal equinox to the dial index. This is the conventional first day of spring. If the model has been properly constructed, both north and south poles will be just getting sunlight. The dawn and sunset lines will run from pole to pole. Northern and southern hemispheres are now both getting exactly the same amount of radiation. What is the relative length of day and night?(1)

Now swing the dial to the summer solstice. The north pole now gets sunlight regardless of the time of day. It's summer in the northern hemisphere. The Antarctic, however, gets no light at this time of year. The ancients called an explorer returning from the south a liar when he stated that his shadow fell to the south. Did he have to go south

of the equator for this to occur?


Let's get the moon into the act. Can you see a full moon at noon?(2) A new moon at midnight?(3) At Sunset, in what direction must a full moon be looked for?(4)

Now for some eclipses. Turn the dial so it is close to one of the equinoxes. Swing the moon so that its shadow falls on the earth for solar eclipse. Then swing it around to the dark side for an eclipse of the moon. Some thought and tinkering should indicate that lunar and solar eclipses occur


with about the same frequency.

How come, then, lunar eclipses seem to occur more frequently than solar eclipses?(5) What's the phase of the moon during a lunar eclipse? (6) During a solar eclipse?(7) It should be possible to devise some elaborations on this model. One possibility is a sun dial consisting of a 24-hour dial and pointer attached to the north pole. This could be adjusted to give the correct solar time for any point on earth.

(Continued on page 48)

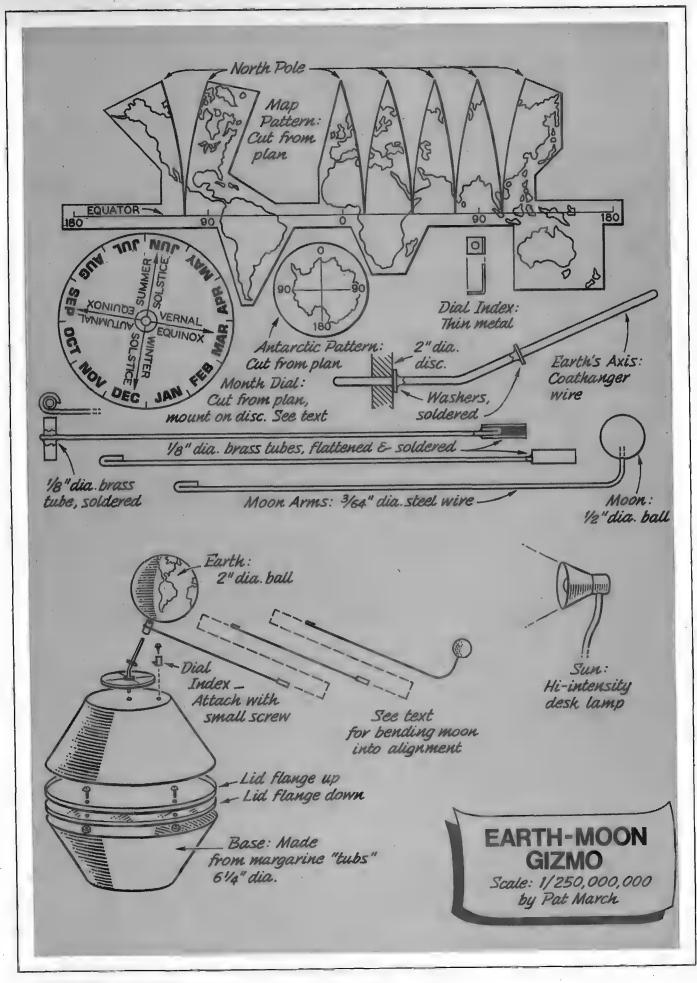

perfection

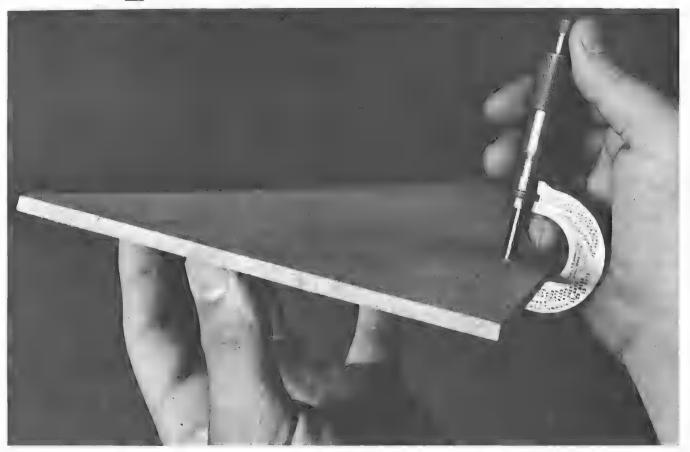

Balsa That Makes A Difference!

MIDWEST'S Balsa is the difference that helps you build the model you've always wanted to build. Inspected three times; straight grained, pre-sanded to (.002) tolerances, all add to ease in building that "special" model you've always wanted. Don't hassel yourself any longer—Go the route champions choose—Go perfect with MIDWEST'S MICRO-CUT Balsa!




ask for our new spruce too. you'll love it!

Manufacturers of Contest-Tested Airplane Kits, Balsawood, Nitro X Fuels and Contest-Tested Accessories.



400 SOUTH INDIANA STREET, HOBART, INDIANA 46342



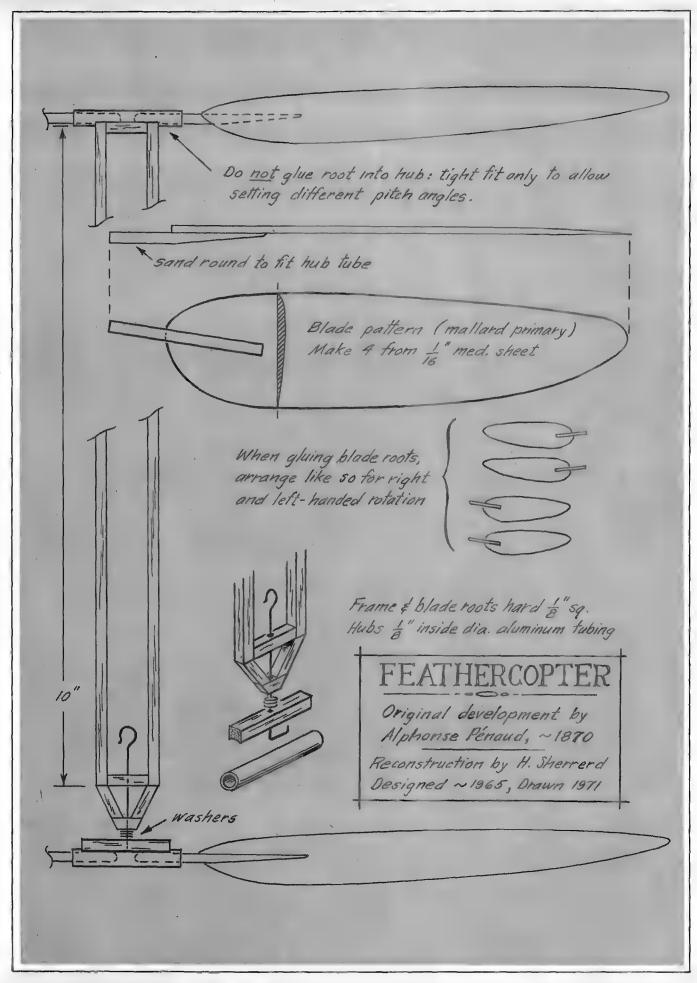



THE BEST WAY TO FINISH YOUR MODEL IS WITH SIG SILK AND

IT'S ALSO THE LOWEST COST



COLORS

Polar Gray Lemon Yellow ub Yellow Tennessee Red Light Red Forest Green Dark Green

BRUSH

4 Ounce. . . \$.59

8 Ounce. . . \$.95

Pint. \$1.49

Quart. . . . \$2.79

New 1/2A Profile

DEWEYBIRD

Brite Green Light Blue Miami Blue Dark Blue Jet Black Orange

Diana Crepm

Metallic Blue Metallic Mara

16 Ounce. . . \$1.39

AVAILABLE Chocolate Brown Olive Drab White Silver

> SPRAY 3 Ounce. . . \$.49 6 Ounce. . . \$.79

SIG BEGINNER'S MODELS AMA RACER AMA CUB.

390

by FRANK EHLING PROP ASSEMBLY INCLUDED RUBBER-POWERED

TISSUE COVERED. The A.M.A. Cub is on official design of the Academy of Model Aeronautics. It has been designed to enable youngsters from eight years old and over to successfully build and fly their first model air-

#1 TRAINER

WINGSPAN 12"

PRESHAPED AIRFOIL

KIT CL-13

SEMI-SCALE GOODY EAR RACER

WINGSPAN: 28" ENGINE: .10-,15

U/C PROFILE

FULLY DETAILED PLAN

FEATURES ADJUSTABLE WING

TISSUE COVERED

RUBBER-POWERED PROP ASSEMBLY INCLUDED

> KIT FF-15 PARASOL

PLAN IS COVERING MATERIAL NO PAINTING REQUIRED WINGSPAN 18" PROFILE RUBBER-POWERED

BUSTER

\$495

U/C PROFILE SEMI-SCALE GOODY EAR RACER WINGSPAN: 24" LENGTH: 241/2" ENGINE: .010 to .15

SIG CUB COMPLETE KI

FLIES 1000'

B

RUBBER-POWERED ENDURANCE MODEL

MOLDED PLASTIC PROPELLER

\$129

#2 TRAINER WINGSPAN 14"

PRESHAPED AIRFOIL

FULLY DETAILED PLANS

KIT FF-12

LENGTH: 23"

79¢

WINGSPAN: 24'

11" Molded Form Wing!

For any tank mounted .049 Can be built in one short evening.

'Second Step' Model after AMA CUB

WINGSPAN 24" COMPLETE KIT

by FRANK EHLING

KIT CL-10

\$295

FULL-SIZED PLANS

TER ZINKAD

TOWLINE GLIDER KIT FF-2

KIT CL-12

s 5 95

TOWLINE GLIDER KIT FF-3 BIG 40" WINGSPAN

Strong, Simple Construction Kit Features Die-Cut Sig Bolsa

1250

SCALE APPEARANCE

WINGSPAN: 221/2"

.049 ENGINE

KIT CL-15

Designed by Dave Shipton

Designed by Dave Shipton, owner of Hobby Hide-A-Way, Delavan, Illinois, The Deweybird Mark + is a semi-scale control line model of Jim Dewey's Dove has created a model that is very easy to build and fly. The beginner should have no trouble with this airplane, yet flight characteristics are such that the advanced modeles will enjoy it. It will perform well on any good .049 engine. There will be larger Deweybirds out soon.

NEW

The KWIK BILT Series is a completely new concept in model building. The modeler first constructs what is basically a simple profile model Then he adds two molded plastic fuselage shells that give the model complete form and detail. The balsa profile gives the model a great deal of strength and the resulting model is very light weight for good flying qualities, yet can be built by even a novice in a very short time. Other models in the KWIK BUILT line will be available soon.

Semi-Scale KIT KBCL-1

1/2 A Control Line 18" WINGSPAN .049 ENGINE SHAPED BALSA WING

18" WINGSPAN .049 ENGINE SHAPED BALSA WING

\$395

KIT KBCL-2 1/2 A Control Line 62" WINGSPAN FREE FLIGHT OR RADIO CONTROL A high performance towline glider of proven design. Strong, Simple Construction.



Send Only 50¢ Today for SIG'S BIG NEW CATALOG! Model Builders' "Bible"

THE 1971 SIG CATAIOG is the greatest Model Airplane Catalog yet! Over 224 pages devoted exclusively to merchandise used in the building fiying of model airplanes. Features the complete Sig Lime, plus practically all other lines available. Hundreds of models — illustrated including gliders, sailplanes, rubber powered flying scale, coatrol line stunt and scale, and every type of R-C model. Send 50c today for your copy or buy it from your local hobby dealer. You will agree it is the best bargain in the model airplane industry.

ORDERING

FIRST, SEE YOUR LOCAL DEALER! If he will not supply you, then order directly from our plant. We will ship promptly. To Order, please add \$1.00 for postage and handling in the U. S. Canadian orders please add \$1.50. Minimum order is 81.00. Please remit by bank draft, check or money order.
Print your name and address plainly. Sorry, No C.O.D. shipments. All prices subject to change without notice.

ac manufacturing co., inc 401 S. FRONT STREET MONTEZUMA, IOWA 50171



Pylon Polisher (Continued from page 13)

From then on, any time somebody put on a race for the big, fast, powerful Unlimited racers, Clay Lacy was there. At Lancaster, Calif., in 1965, he came in second. At Reno, later that year, he was third. Two weeks after Reno, down south near Las Vegas, he cut a couple of pylons and came in fifth. The flying hot-rods were winning these races, but they were starting to have trouble with their engines which can't always stand the beating.

Early in 1966, back at Lancaster, Clay Lacy almost pulled it off. He led the championship race right from the start until the next-to-last lap. With big lead on the field, it looked like he had the race in the bag-when a \$1.50 part in his propeller hub broke. The prop went into high pitch and Clay had to make # very quick landing. All that was hurt was his pride, though he was enough of a sport to wear the broken part on a string around his neck when the trophies were presented that evening.

Despite such bad luck, he stuck with it. In 1967, 1968 and 1969 he again placed third in the big meet at Reno, and it looked like he was stuck. While third is a lot better than last, or even fourth, it still isn't anything like winning. And winning was what Clay Lacy was in air racing for. Other kinds of flying can be exciting and satisfying, but only in racing can pilot get the true thrill of tearing around with

the best and beating them, fair and square.

Lacy was getting more than his share of exciting flying, even if you don't happen to think that jockeying DC-8 between Los Angeles and New York is much action. The first test flight of something as off-beat as the bulging "Guppy" has to be pretty thrilling, and Lacy was at the controls that time. If it's drama you want, imagine yourself flying the camera plane on that sad day when the great test pilot, Joe Walker, crashed into the majestic B-70 and both went down in flames. Lacy was flying the photographers in Learjet that day.

But it was still racing that turned him on more than anything else. Yet winning was still beyond his reach, mainly because of super racers like Darryl Greenamyer's great white Bearcat. Lacy and his friends had the brains and skills to come up with a super P-51 that might have given Greenamyer quite a fight, but then the pretty purple airplane wouldn't have been much good for anything but

So how do you win with a stock airplane when some of the other pilots have souped-up ones? You've got to be patient, and wait for your chance. The hot ones have habit of going like the wind for a short time and then giving out, usually because of a broken engine. When that happens, a really fine stock racer has a good chance to come home in front. After all, to win a race you have to fly all the laps.

And after six exciting but winless seasons, Clay got his big chance at Reno in 1970. The "hot iron" was having trouble. Chuck Hall's gorgeous P-51 never got off the ground. Cliff Cummins' slick Mustang was on the ground for good, having bellied-in during a heat race. In the championship race for the Harrah's Trophy, Greenamyer couldn't get his landing gear up, while the huge engine in Lyle Shelton's Bearcat blew up during the second lap. Lacy poured it on, feeling that his time had come. Despite being hard pressed by Mike Loening, Howie Keefe and other veterans, he screamed over the finish line with a good lead, and won!

Or so he thought, A pylon judge said Lacy had cut pylon, so the officials dropped him all the way down to fifth place. Clay protested, the pylon judge admitted he wasn't doing his job the way he should have, and after I lot of arguing, the beautiful trophy was finally handed to **•** tired Clay Lacy. After seven long years, he had at last won the big one. No doubt about it, it pays to be determined.

Especially if you have a purple airplane!

if you want some fun . . . then go out and get yourself one or more of these

And are they simple! Kits contain from 6 to 9 die-cut Balsa parts as well as the metal engine mounts. complete Control System (less lines and

KIT S-35 BEGINNERS THUNDERJET 2.95

and the flight performance is just great. . . . and if you bash the ground "when you're not ready to land," they're so light and strong By the way, Engines from most ready-Plans are easy to read and complete.

KIT S-37 BEGINNERS EINDECKER 2.95



KIT S-36 BEGINNERS SUPER CUB 2.95



S-30 BEG. RINGMASTER 2.95



S-32 BEG. RING. BIPE. 3.50



AVAILABLE

PRICES SUBJECT TO CHANGE WITHOUT MUTICAL



S-34 BEG, SPITFIRE 2.95



. . . for your fun . . . for your money.

nifty little Control Line models.

handle), Landing Gear, Wheels. authentic Decals, etc., all ready to use, which makes assembly a cinch

Almost any .049 Engine can be used

that they're practically damage-free.

to-fly plastic models can be used. so if you have one, don't waste it. It might require a little modification

> They even have a run-down on beginners' first time flights.

There are six models at \$2.95 and

... so get over to your dealer's and take a look . . . at \$2.95, you'll find they're the MOST

one Bipe (double winger) at \$3.50, all about 21" wing span; and all the tools you need are generally found around

IN ONLY MINUTES!

to install, tho.

the house.

S-31 BEG. MUSTANG 2.95

STERLING MUIIII

8ELFIELD AVE. and WISTER ST.

PHILA., PA. 19144
If no dealer available, direct orders accepted—with 10% additional charge for handling and shipping. (60c minimum in U.S., \$1.25 minimum outside U.S.)

Catalog of entire line of airplane control line model kits, R/C scale and

Trainer kits, boot model kits, accessories; etc. 25c enclosed.

"Secrets of Model Airpiane Building." Including design, construction, covering, finishing, flying, adjusting, control systems, etc. 25c enclosed.

"Secrets of Control Line and Carrier Flying." Including preflight, soloing,

stunting, Carrier rules and regulations, Carrier flying hints and control line installation instructions. 25c enclosed.

Name Address _ City



ALL SIZE ENGINE MOUNTS
SPECIAL ENGINE MOUNTS
TANK MOUNTS
TANK MOUNTS
R/C STEERABLE NOSE GEARS
R/C WING HOLD DOWNS
NYLON SCREWS
MYLON SCREWS
MYLON SPINNERS
FIXED GEAR HOUNTS

ENGINE TEST STANDS

PEACE PIPE MUFFLERS
CALUMET MUFFLERS
ENGINE MANIFOLDS
MUFFLER EXTENSIONS
MUFFLER SPARE PARTS
FUNDERS TRICKS

CHICKEN STICKS U-CONTROL HANGLES FOUR WAY MRENCHES

HOW DO YOU GET TATONE PRODUCTS? It is really very simple, Just visit your local hobby shop, All items listed [18] AVAILABLE to all hobby dealers and distributors world wide. Some hobby shops in non-flying meet may not stock our line. Or perhaps there is no dealer convenient to you. If such is the case, then do not wait, ORDER DIRECT from us. Orders shipped same day received.

Send 25¢ for illustrated catalog, Dept. JAH

SPEED PANS PEN BLADDER FUEL TANKS STICKA-TUBE FUEL TANKS FUEL TANK VENT FILLERS ENGINE PRIMERS GLUE BOTTLE NOZZLES BATTERY CHARGERS



Earth-Moon Gizmo (Continued from page 41)

MAN TINERS

SUMBICAL TUBING
SCALE INSTRUMENT KITS
R/C, U-CONTROL HINGES
ANA SAFETY PROP NUTS
ENDINE TEST STANDS
GLOW FLUG STANTERS

SPINNERS

ATONE PRODUCTS

Another possibility is the mechanization of the device. Something like this was done, with day and month simulated with a 30-to-1 worm gear drive working from a toy motor. Since the lunar month is approximately 29 days, why would 30:1 be the correct ratio rather than 29:1?(8) Regrettably, it is not practical to detail the motorized version because of complexity and difficulty of obtaining suitable parts.

A severe drawback to this model is that it could give the impression that eclipses can occur only close to the equinoxes. That is because in the model, the moon is in strict equatorial orbit, as if only the earth influenced its motion. The true orbit would be unbelievably complicated to simulate. Also, because the lunar distance is so short, eclipses occur much more readily in the model than in nature, and the moon's shadow is about three times as large as it should be.

I would be happy to hear of successes (or difficulties) with this model. Write to me, care of this magazine.

Answers

Day and night are equal at the equinoxes.

2. No. He would have to be south of a line from the center of the earth to the center of the sun. At the summer solstice, he would have to be farther south than 231/2 degrees from the equator. That is, he would have to be within the tropics.

3. No. Full moon at noon or new moon at midnight is impossible. The Model shows it better than any explanation.

4. At sunset, if the moon is full, it will be seen in the east (Harvest moon).

5. When an eclipse of the moon occurs, all of the people on the night side of the earth can see it, but an eclipse of the sun is seen only by those people within the rather small shadow cast by the moon,

- 6. Lunar eclipses occur only at full moon.
- 7. Solar eclipses occur only at new moon.
- 8. The difference between the number of revolutions of the earth and rotations of the moon determines a lunar month.


It's Sam! (Continued from page 9)


To complete the gluing operations on this model, add the line guide to the left wing, wing tip weight to the right wing (a nickel is about the right weight) and the plywood bellcrank mount to the left wing. This last may not be essential if you used pretty firm wood for the wing. But it's not m bad idea to use it.

Now Uncle should be ready for his first two coats of clear fuel-proof dope (butyrate type). Don't forget also to dope his coattail elevators which are still unattached to the rest of the model. Unhappily you will find that when this dope has dried, Sam will be somewhat fuzzy again, so gently smooth him down again with very fine sandpaper,

Mask off with masking tape those areas that are to be painted white. This will include the upper portion of his hat, his beard, cuffs, and trousers. Apply one coat of clear dope to the edges of the masking tape to avoid the color seeping under, and when this has dried give two coats of white. With the white dry, mask as before for the red areas: stripes on hat, cuffs and trousers, and when the red dope is dry, again mask off for the blue areas remaining and for his black shoes. The clear finished balsa will serve nicely as the flesh color of his hands and face. The features of his face can be drawn with a felt-tipped pen.

The stars, so essential to our Uncle's costume, are the little gummed paper stars sold by dime stores. The silver ones are particularly striking when applied, using model cement, to hat band, coat and coat tails, and blue stars on the cuffs. It will be necessary to protect these stars with **m** coat of fuel proofer or use a spray can of clear fuel-proof dope to avoid smears.

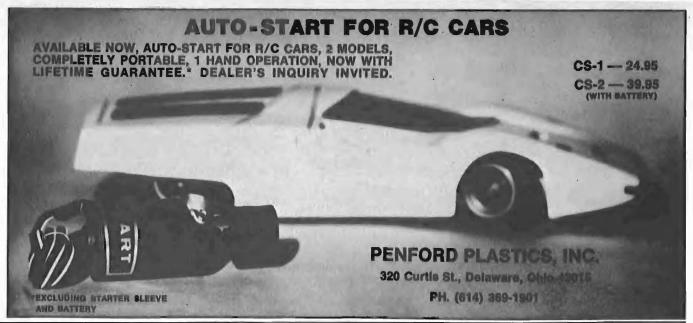



\$2.49 AT YOUR DEALERS (\$3.00 DIRECT)

CATALOG OF KITS & ACCESSORIES - 104

Marlow ENGINEERING

6850 VINELAND, NO. HOLLYWOOD, CALIF. 91605


Now it's time for the control system. After mounting the control horn, the coattail elevators are attached to the wing using a strip of blue Mystic brand cloth tape across the bottom as a hinge. Allow a gap of 1/16" between the wing and elevator to insure free movement. There is no simpler way to hinge a ½A-size model, and it makes a very free moving hinge indeed.

The pushrod is next bent from a piece of .045 music wire, inserted in the holes in the horn and bellcrank and the

bellcrank secured to its mounting.

If you can locate a very small American Flag, its staff can be glued into a small hole in Sam's right hand and besides appearing patriotic, it will provide a beneficial drag to help keep the lines tight.

About all that remains at this point is to bolt your engine to his hat, sort of a Babe-Bee on his bonnet! Check that the model balances as shown on the plan, and wait for a calm day to try it out. Though it may detract from appearance, a simple landing gear may be mounted between the engine and firewall and will facilitate the first flights.

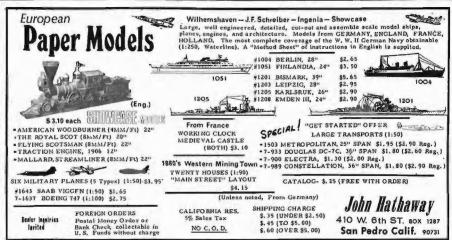


Otherwise, you'll have to hand-launch and fly over grass.


I think that you will find our Uncle Sam is now a fine flyer as well as the splendid fellow that we have always known.

MATERIALS LIST

1-1/4" x 3" x 36" (18" if you have it) balsa for fuselage; 1-1/8" x 3" x 36" balsa for wing; .045 wire for pushrod. Elmer's glue, or model cement for wood; fuel-proof dope; clear, red, white, blue, and black; thinner, brush, masking tape. Cox .049 Babe-Bee engine. 1 sheet 1/8" plywood. 3-48 x ½" mounting bolts, blind mounting nuts; ½A bellcrank and elevator horn.

As an alternative to the hardware and plywood listed at the end of the above list, Sterling Models, Belfield Avenue and Wister St., Philadelphia, Penn. 19144, has a complete packet of hardware, including aluminum firewall brackets, for those of you who may be stumped by cutting plywood, made for the "Beginner's Ringmaster" S-13, at a cost of 65 cents (plus 60 cents for postage and handling).

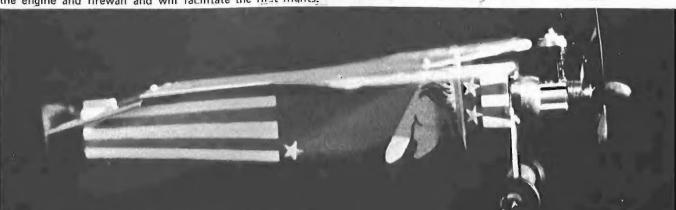


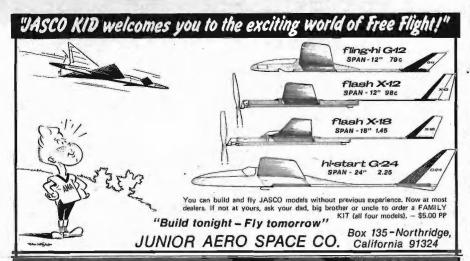

AMERICAN AIRCRAFT MODELER LIBRARY SERIES

Getting Started in R/C?

START TODAY—order
Howard McEntee's
"GETTING STARTED IN R/C."
Nineteen chapters of this informative series are now in a single volume at the low price of \$1.25 ppd. Use this book as a firm foundation for a start in Radio Control. Use the coupon below.






Interested in Control-Line?

START OFF with Howard Mottin's "GETTING STARTED IN CONTROL-LINE."

It's Vol. II in AAM's library series for the novice and the expert. Chapters cover all aspects of C/L—where to start, how to build, trim and fly plus a thorough review of competition events. \$1.25 ppd. Use the coupon below.

\$1.25 each or Order Both for only \$2.00


AMERICAN AIRCRAFT 733 Fifteenth Street, N. W., W		
	orcopy(s) of Mottin's	GETTING STARTED IN
(Price: \$1.25 each).	copy(s) of McEntee's (GETTING STARTED IN R/C.
RUSH TO:		, at \$2,00 per dot.
ADDRESS:		
CITY	STATE	ZIP



PLANS & THINGS


• KARLSTRÖM DRAWINGS •
• ACCESSORIES • SUPPLIES •
CO2 • PEANUT SCALE PLANS
WHEELS • PIRELLI RUBBER
MANY MOREI SEND A QUARTER FOR OUR CATALOGI
W. C. HANNAN, GRAPHICS BOX A
ESCONDIDO • CALIFORNIA 92025





PULSE PROPORTIONAL .. Best Choice for You!

THE SIMPLE SYSTEM--

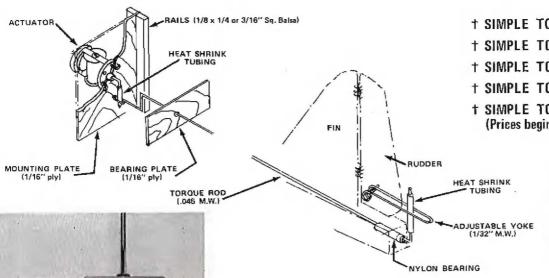

- **† SIMPLE TO INSTALL**
- † SIMPLE TO FLY
- **† SIMPLE TO MAINTAIN**
- **† SIMPLE TO REPAIR**
- **† SIMPLE TO OWN** (Prices begin at \$69.95)

Look for this emblem



Your Sign of Quality!

Designed for the new small PRACTICAL flying machines. These designs really fly-and fly well; not in the novelty class. Easy to build, low in cost, inexpensive to fly. Fly in limited areas.

RUDDER ONLY PULSE IS:

- **FULLY PROPORTIONAL**
- LIGHTEST WEIGHT--2,5 oz. for the Baby w/225 ma nicads.

ACB 1/c

PHILSE

COMMANDER

- LOWEST COST--begin at \$69.95! (with airborne nicad batteries and charger).
- * SIMPLEST-only one moving part, easily serviced and maintained: noise free.
- * VERSATILE--Arrange to suit your particular installation. You can go up or down in size without obsoleting your receiver or transmitter. Simple changes of battery packs and actuators allow change at will. Or add Motor Control to Standard or Stomper--using same battery pack.
- GREAT for Beginners--FUN for Experts.

ALL UNITS ARE COMPLETELY WIRED, TESTED, GUARANTEED

BEST SELLER

We're on the THIRD Printing of our 1971 Handbook Catalog! The demand exceeded expectations. One of the reasons is that it contains the most comprehensive information and data for Pulse Rudder Only published anywhere. Send coupon and \$1,00 today. Refundable on your first order.

Don Dewey says: "This should be in the library of every modeller!" Walt Schroder says: "An exceptionally well done job."

COMMANDER R/O PULSE COMBOS With Airborne Nicads & Charger

Our Commander R/O Pulse Combos are available in 4 sizes for most sporting needs from the smallest to the larger aircraft--or boats.

The Baby Is for .010 to .020 jobs. Has two 225 ma Nickel Cadmiums and the regular Baby Adams, Airborne weight is 2.5 oz.

The Baby Twin is for hot .010 to .020 Jobs. As above, except uses Baby Twin actuator. Airborne weight is 2.9 ounces.

The Standard uses the Single Adams for more power for .049 to .07 size. Uses larger capacity nickel cads, Airborne weight is 4.5 oz. The Stomper uses the Twin Adams actuator for up to .15. Airborne weight is 4.9 oz.

10G15-COMPLETE R/O Baby Combo \$69.95 10G15T-COMPLETE R/O Baby Twin 72.95

10G16-COMPLETE R/O Standard Combo 71.95

10G17-COMPLETE R/O Stomper Combo


26.995, 27.045, 27.095, 27.145, 27.195 mHz Please Specify

9 V. Transmitter Battery Extra

TRY YOUR DEALER FIRST --

if he can not supply you, send your order to us on the coupon below.

My BankAmericard #



DICK'S DREAM PLANE KIT For the Beginner or Expert! (Designed especially for pulse)

Full step by step instructions to assist in building this gem of a kit, AND ultra simple in-stallation shown for the Commander R/O Baby or Baby Twin!

Span Is 34" (cut from the Ace taper wing foam sections), 5½" chord, length is 25 inches. Weight with R/C gear is 12 to 14 ounces. With a Pee Wee .020 and a Commander R/O

Baby you have a docile performer and excellent trainer. If you want something hot, Tee Dee .020 with the Commander R/O Baby Twin will do the job-it'll do everything in the Rudder Only book!

No. 13L100-Dick's Dream Foam Wing \$5.95 Airplane Kit

NEW HANDBOOK-CATALOG (Completely Revised)

Combo

Our NEW Handbook-Cataloghas been completely revised to make it easier to locate items you are looking for. More items on less pages, to save you time. Also contains complete info on what makes Pulsa Rudder Only work-and why it is your best bet.

Price Is just \$1.00 via THIRD CLASS MAIL, Refundable on your first order of ever \$5.00.

ADDRESS STATE ZIP QUANTITY NAME OF ITEM PRICE TOTAL STOCK #

ACE RADIO CONTROL, INC. Box 2001 HIGGINSVILLE, MO. 64037

Due to the postal rate increase, add \$1,00 to all direct mallorders

GO RIVETS.

Fly Cox's replica of the winningest Formula 1 Racer in history. Rivets – the racing machine in flashing red and yellow. Big Rivets. Nearly two feet long, it's the biggest ready-to-fly model made. Powered by the famous Cox .049 gas engine. More champion model plane racers use Cox engines than any other in the world. Rivets is built to win.

Super tough polypropylene plastic withstands the fortunes of racing. If a landing is **too** rough, Cox's new Insta-Lock construction lets you snap Rivets back together in seconds. Fly the winner – Rivets.



See it at toy, hobby, and department stores everywhere. See all the Cox winners. Send 25¢ for our complete catalog of model cars, planes, rockets and trains.

